


# Signature Bi-fold Door (100mm)

## Installation Details

## BRICK VENEER - HEAD DETAIL

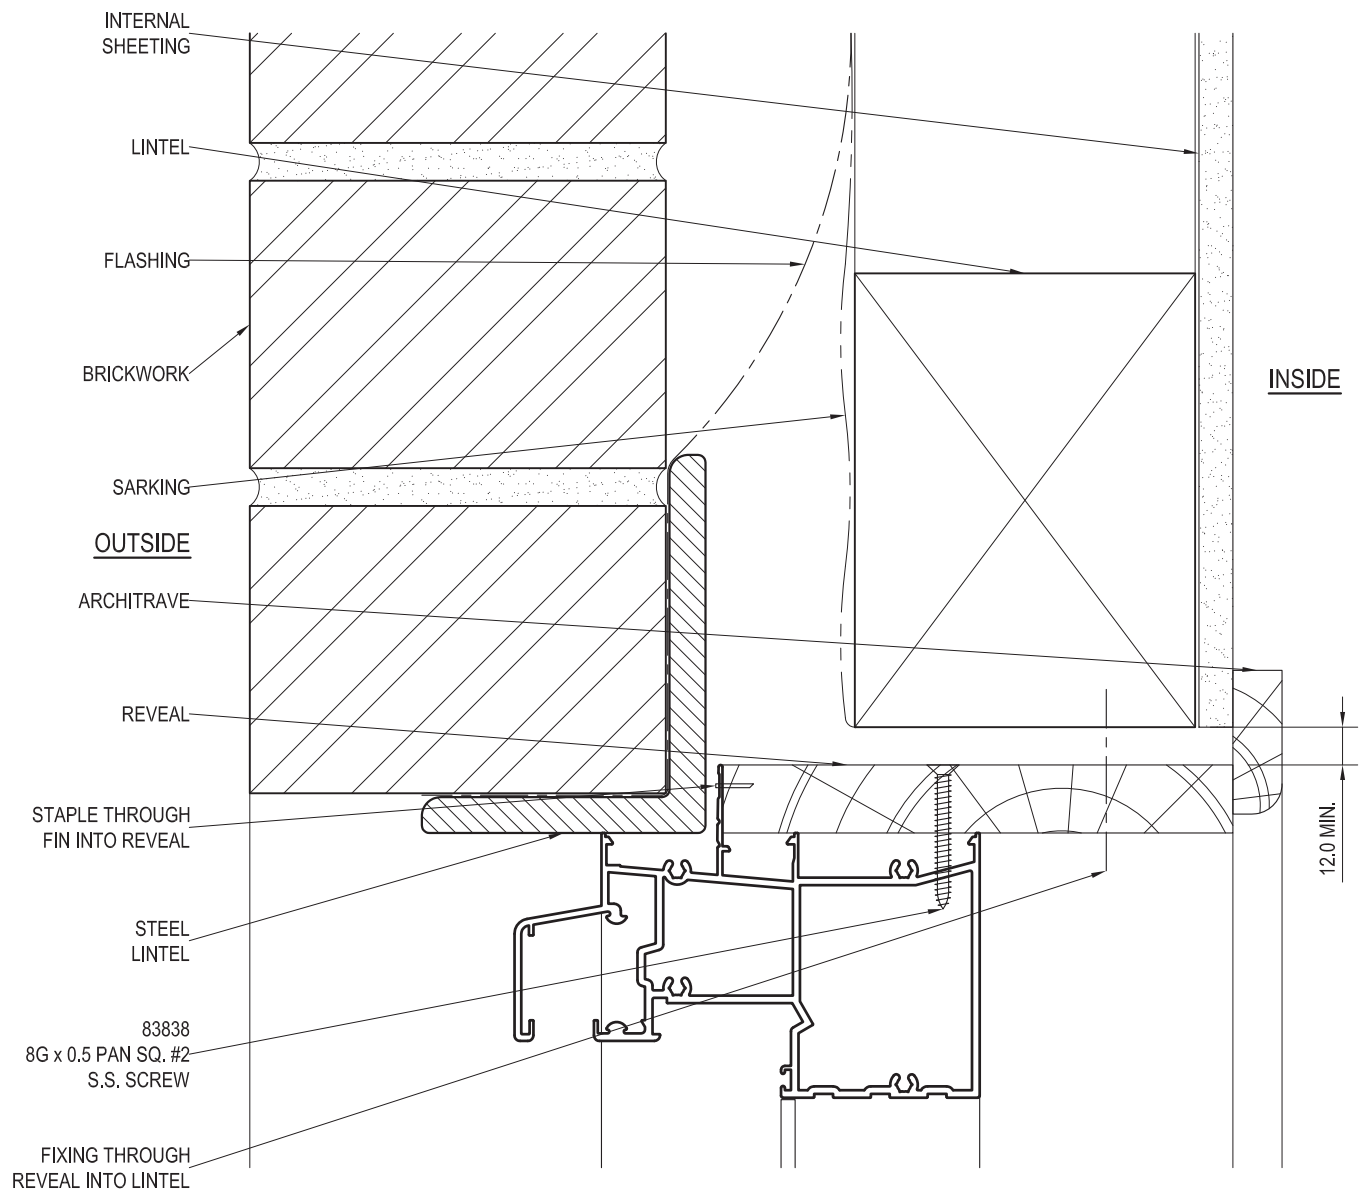

FIXINGS: UP TO AND INCLUDING SITE CLASSIFICATION OF N6, C4 (3.0 kPa) FIXINGS ARE TO BE AT 450mm CENTRE MAXIMUM. FOR SITUATIONS IN EXCESS OF THIS THE FIXINGS ARE TO BE AT 300mm CENTRES MAXIMUM. FIXING SIZE TO BE EQUIVALENT TO A Ø2.2mm STEEL NAIL MINIMUM.

PRODUCT NO: SIG BI-fold Door (100mm)

DATE: 29/07/14

DRAWING NO: SIG-BD-02-01

ISSUE: A

DRAWN: DJH


SCALE: 1 : 2

Bradnam's Windows and Doors Pty Ltd ABN 78 010 409 819 © 2014 All rights reserved.



**Bradnam's**  
windows & doors

## BRICK VENEER - JAMB DETAIL

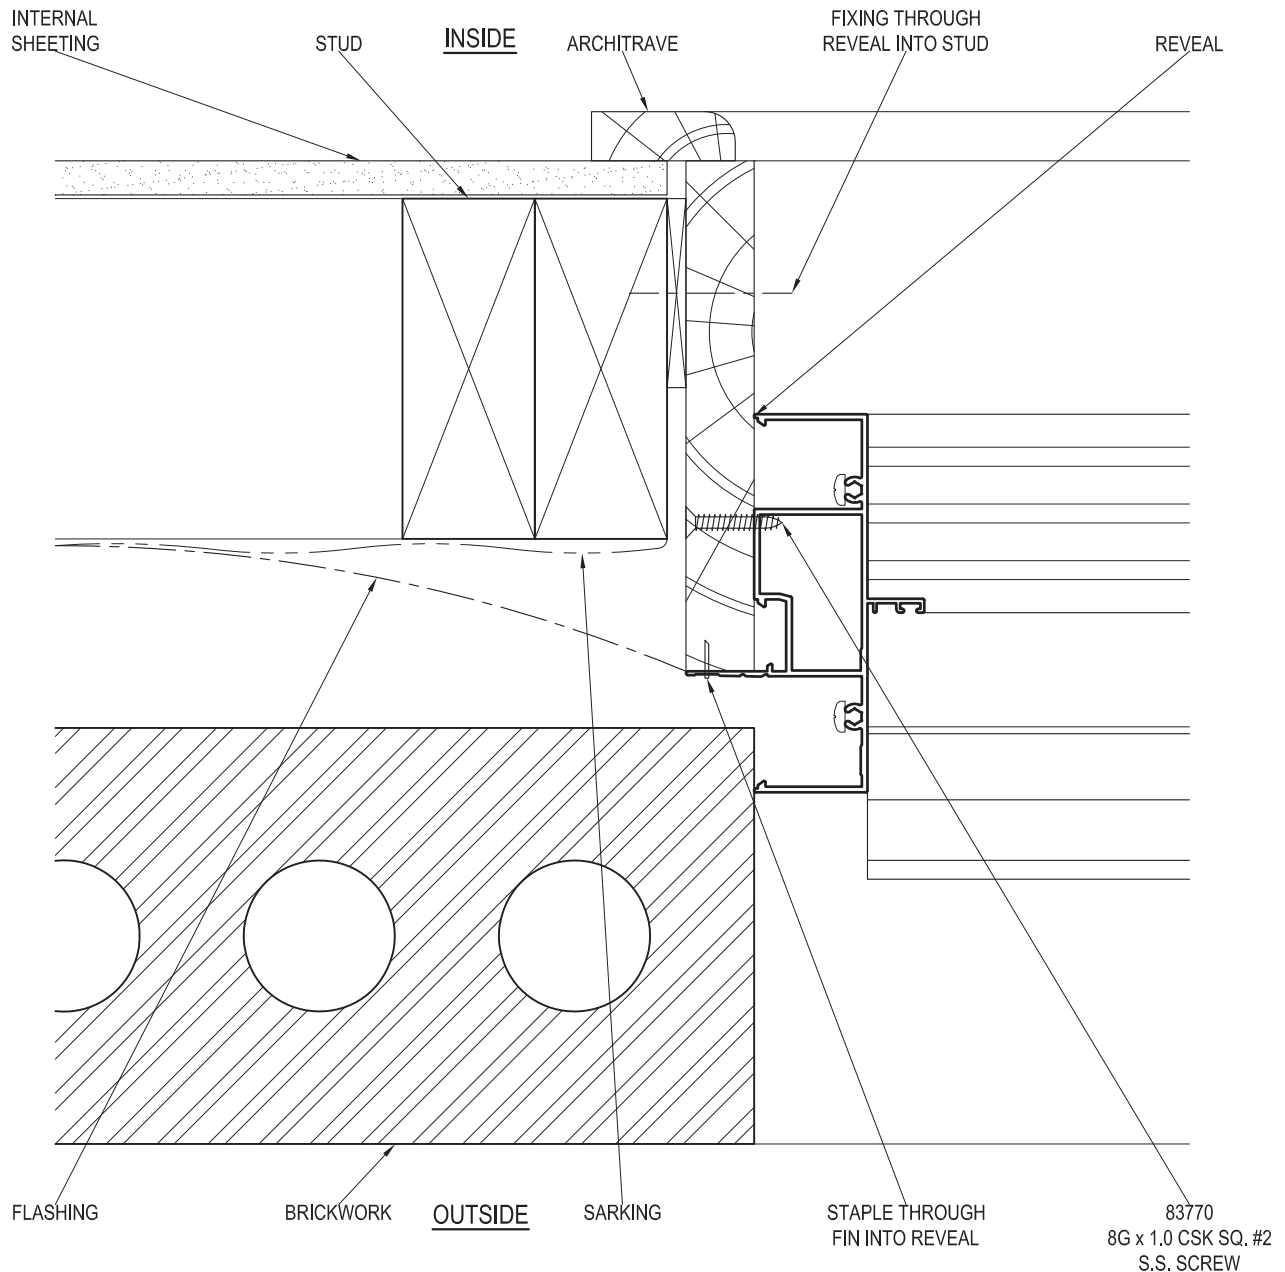

FIXINGS: UP TO AND INCLUDING SITE CLASSIFICATION OF N6, C4 (3.0 kPa) FIXINGS ARE TO BE AT 450mm CENTRE MAXIMUM. FOR SITUATIONS IN EXCESS OF THIS THE FIXINGS ARE TO BE AT 300mm CENTRES MAXIMUM. FIXING SIZE TO BE EQUIVALENT TO A Ø2.2mm STEEL NAIL MINIMUM.

PRODUCT NO: SIG BI-fold Door (100mm)

DATE: 29/07/14

DRAWING NO: SIG-BD-02-02

ISSUE: A

DRAWN: DJH


SCALE: 1 : 2

Bradnam's Windows and Doors Pty Ltd ABN 78 010 409 819 © 2014 All rights reserved.



**Bradnam's**  
windows & doors

CAVITY BRICK - HEAD DETAIL

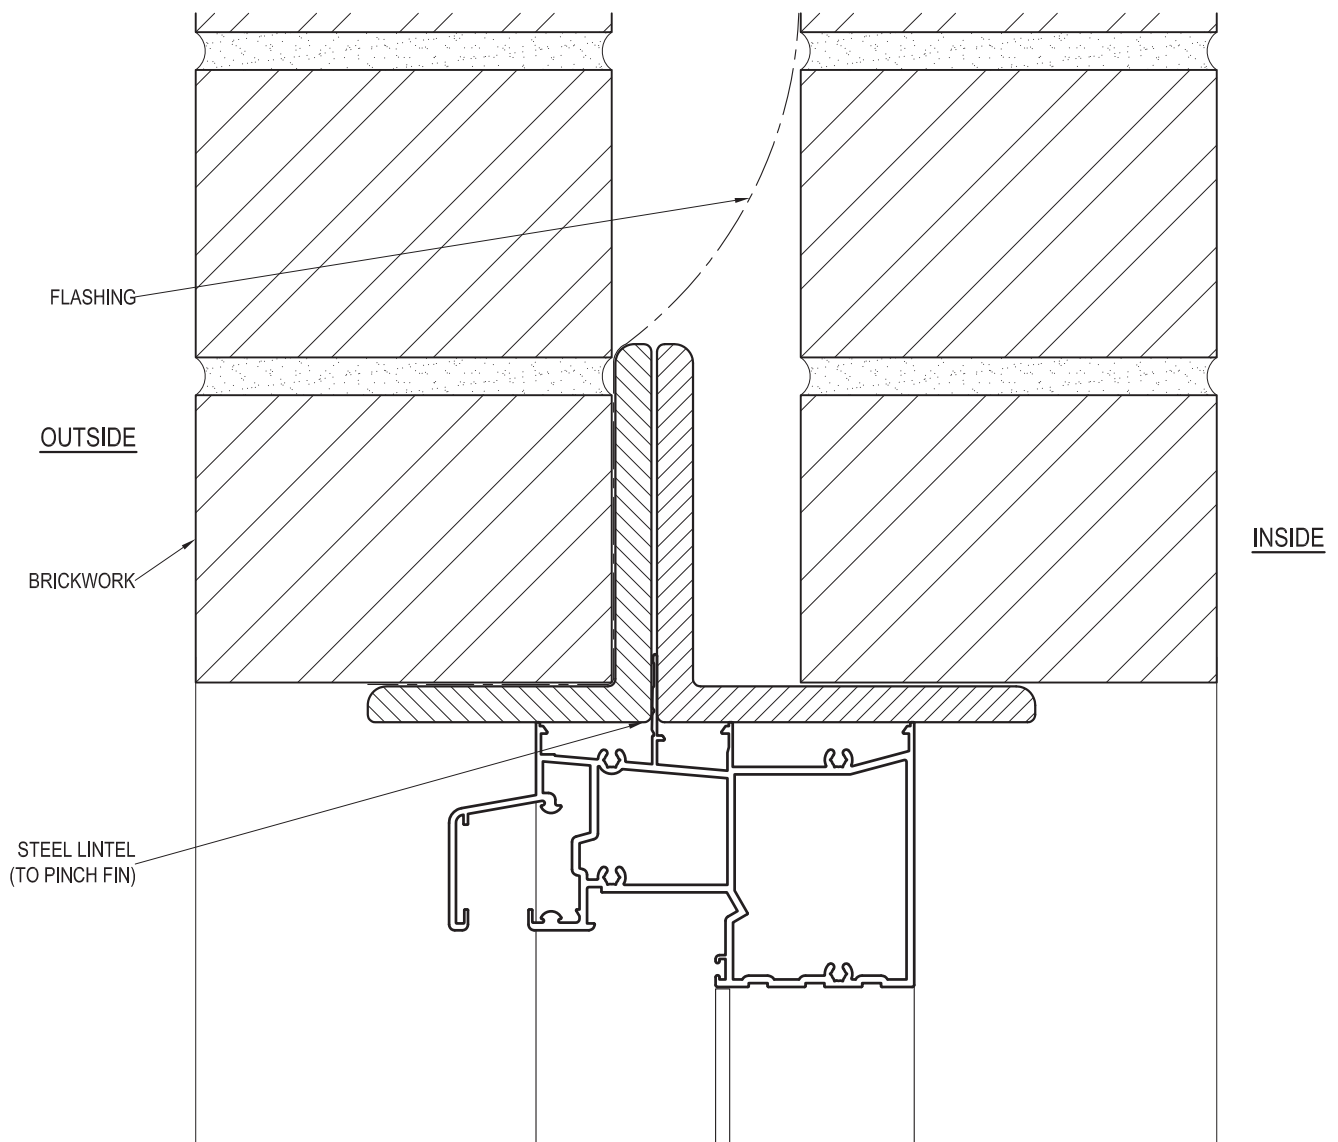

FIXINGS: UP TO AND INCLUDING SITE CLASSIFICATION OF N6, C4 (3.0 kPa) FIXINGS ARE TO BE AT 450mm CENTRE MAXIMUM. FOR SITUATIONS IN EXCESS OF THIS THE FIXINGS ARE TO BE AT 300mm CENTRES MAXIMUM. FIXING SIZE TO BE EQUIVALENT TO A Ø2.2mm STEEL NAIL MINIMUM.

PRODUCT NO: SIG BI-fold Door (100mm)

DATE: 29/07/14

DRAWING NO: SIG-BD-02-03

ISSUE: A

DRAWN: DJH

SCALE: 1 : 2

Bradnam's Windows and Doors Pty Ltd ABN 78 010 409 819 © 2014 All rights reserved.



**Bradnam's**  
windows & doors

FLASHING

INSIDE

80840


GALVANISED BRICK TIE

BRICKWORK

OUTSIDE

This technical cross-section diagram illustrates the construction of a window frame where it meets a brick wall. The diagram is divided into two main horizontal sections: the top section is labeled INSIDE and the bottom section is labeled OUTSIDE. The brickwork is shown with diagonal hatching. Large circles represent the window panes. A central vertical section shows the window frame assembly, including a multi-paneled unit with a handle. A dashed line indicates the transition between the internal and external brickwork. A small circular detail, labeled 80840, is shown in the center of the brickwork. A label FLASHING points to the area where the window frame meets the brickwork. A label GALVANISED BRICK TIE points to a small circular detail in the brickwork. A label BRICKWORK points to the brickwork itself.

## BRICK VENEER & CAVITY BRICK - SLAB ON GROUND

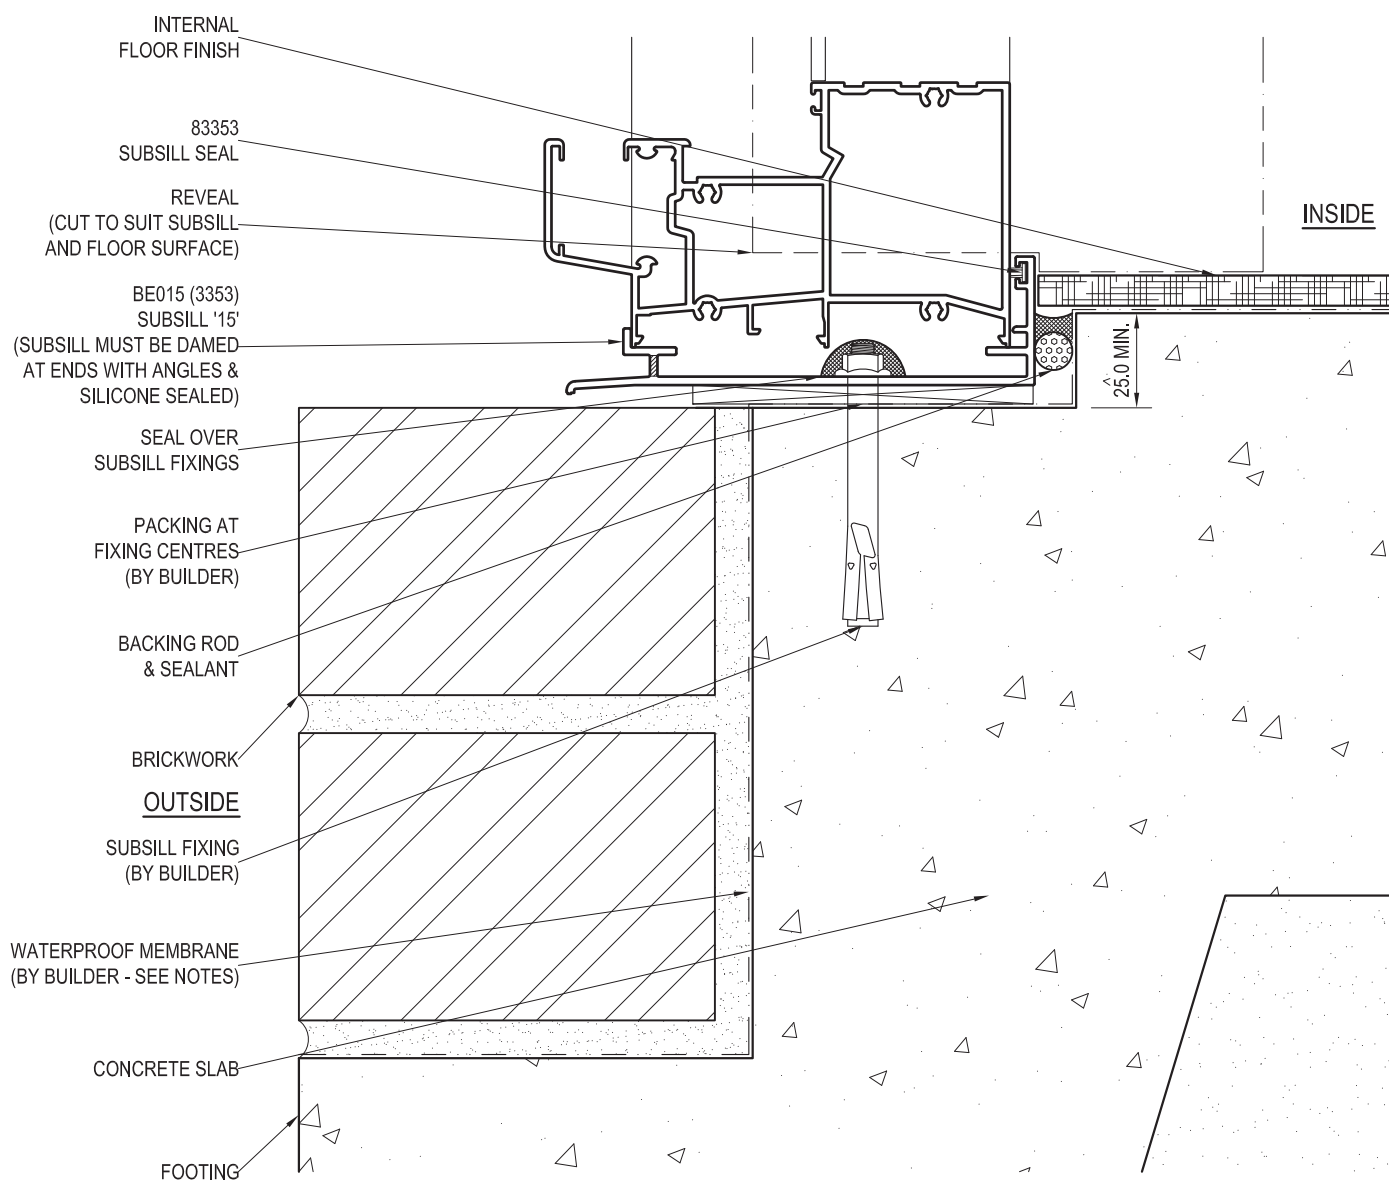

FIXINGS: UP TO AND INCLUDING SITE CLASSIFICATION OF N6, C4 (3.0 kPa) FIXINGS ARE TO BE AT 450mm CENTRE MAXIMUM. FOR SITUATIONS IN EXCESS OF THIS THE FIXINGS ARE TO BE AT 300mm CENTRES MAXIMUM. FIXING SIZE TO BE EQUIVALENT TO A Ø2.2mm STEEL NAIL MINIMUM.

PRODUCT NO: SIG BI-fold Door (100mm)

DATE: 29/07/14

DRAWING NO: SIG-BD-02-05

ISSUE: A

DRAWN: DJH


SCALE: 1 : 2

Bradnam's Windows and Doors Pty Ltd ABN 78 010 409 819 © 2014 All rights reserved.



**Bradnam's**  
windows & doors

## WEATHERBOARD - HEAD DETAIL

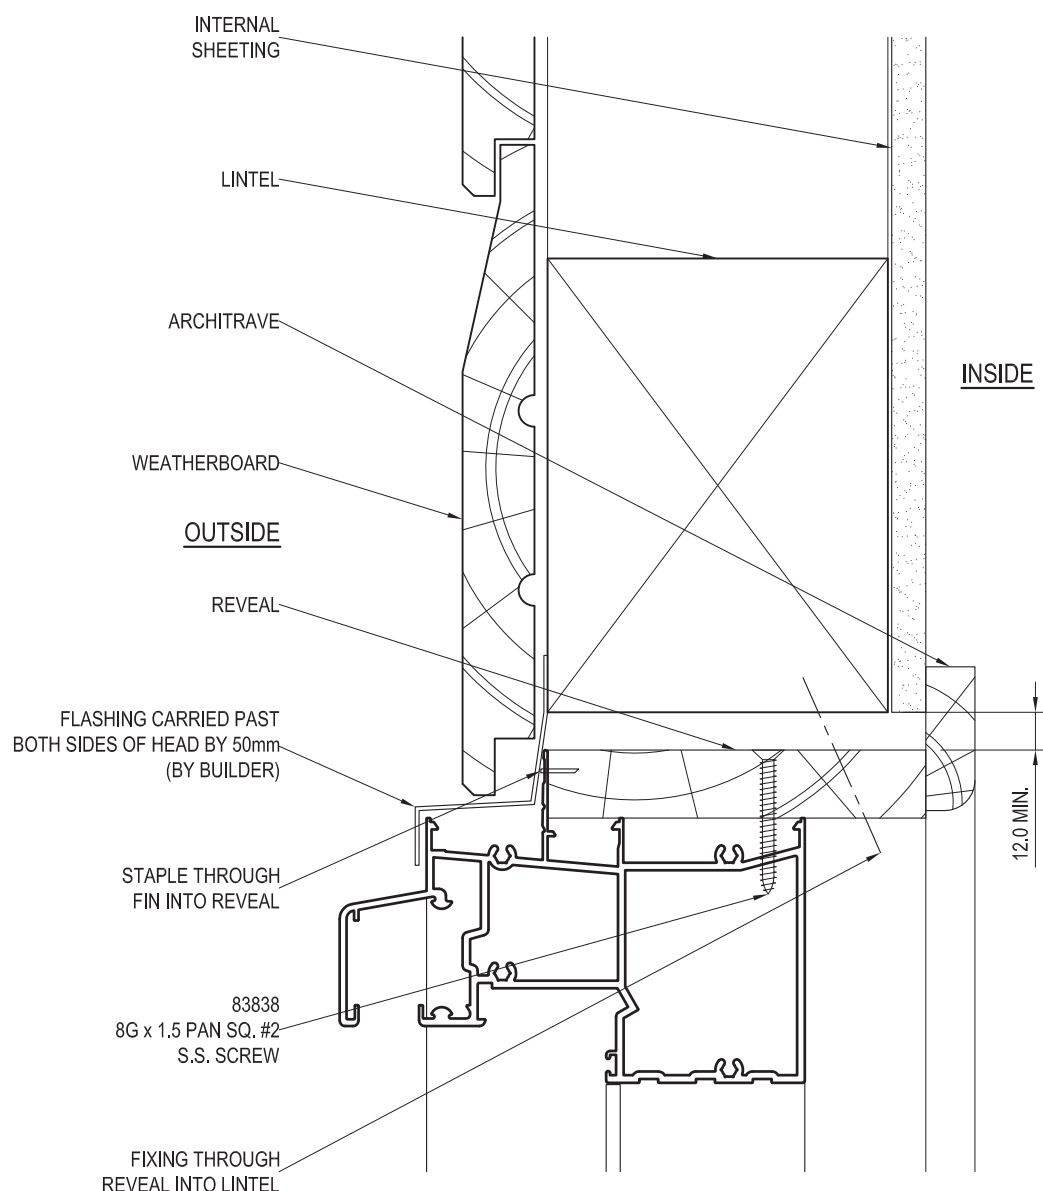

FIXINGS: UP TO AND INCLUDING SITE CLASSIFICATION OF N6, C4 (3.0 kPa) FIXINGS ARE TO BE AT 450mm CENTRE MAXIMUM. FOR SITUATIONS IN EXCESS OF THIS THE FIXINGS ARE TO BE AT 300mm CENTRES MAXIMUM. FIXING SIZE TO BE EQUIVALENT TO A Ø2.2mm STEEL NAIL MINIMUM.

PRODUCT NO: SIG BI-fold Door (100mm)

DATE: 29/07/14

DRAWING NO: SIG-BD-02-06

ISSUE: A

DRAWN: DJH


SCALE: 1 : 2

Bradnam's Windows and Doors Pty Ltd ABN 78 010 409 819 © 2014 All rights reserved.



**Bradnam's**  
windows & doors

## WEATHERBOARD - JAMB DETAIL

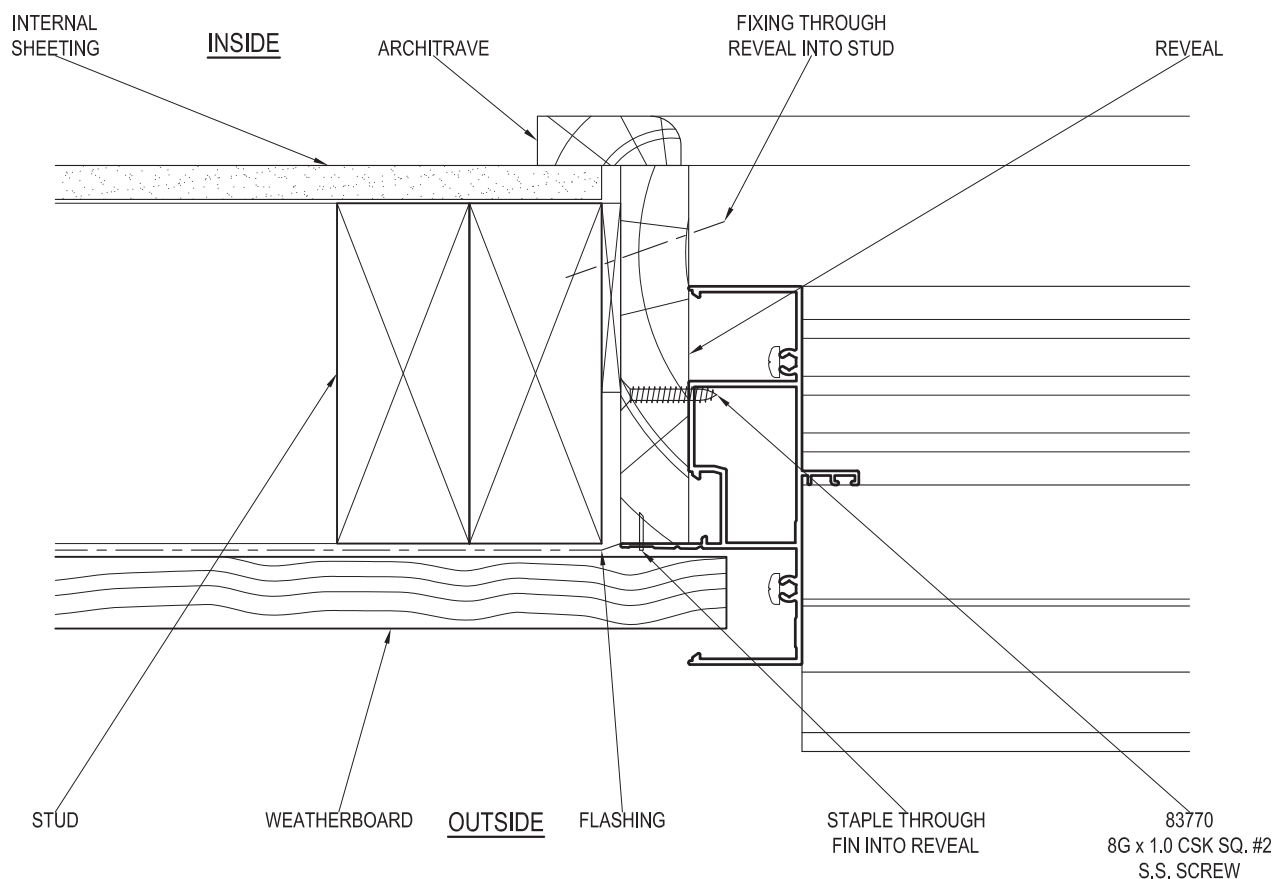

FIXINGS: UP TO AND INCLUDING SITE CLASSIFICATION OF N6, C4 (3.0 kPa) FIXINGS ARE TO BE AT 450mm CENTRE MAXIMUM. FOR SITUATIONS IN EXCESS OF THIS THE FIXINGS ARE TO BE AT 300mm CENTRES MAXIMUM. FIXING SIZE TO BE EQUIVALENT TO A Ø2.2mm STEEL NAIL MINIMUM.

PRODUCT NO: SIG BI-fold Door (100mm)

DATE: 29/07/14

DRAWING NO: SIG-BD-02-07

ISSUE: A

DRAWN: DJH

SCALE: 1 : 2


Bradnam's Windows and Doors Pty Ltd ABN 78 010 409 819 © 2014 All rights reserved.



**Bradnam's**  
windows & doors



FIBRE CEMENT SHEET - HEAD DETAIL

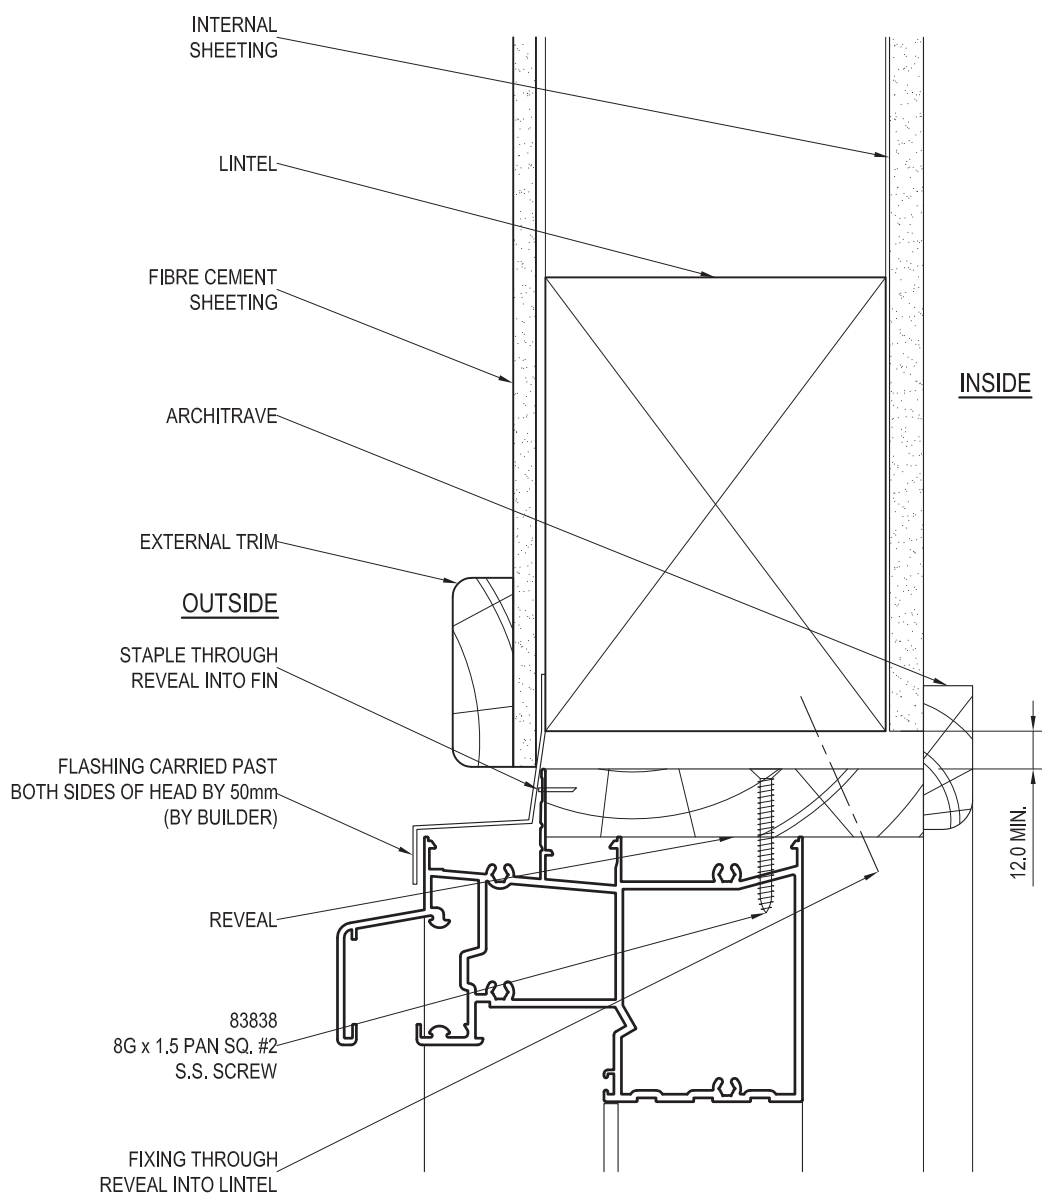

FIXINGS: UP TO AND INCLUDING SITE CLASSIFICATION OF N6, C4 (3.0 kPa) FIXINGS ARE TO BE AT 450mm CENTRE MAXIMUM. FOR SITUATIONS IN EXCESS OF THIS THE FIXINGS ARE TO BE AT 300mm CENTRES MAXIMUM. FIXING SIZE TO BE EQUIVALENT TO A Ø2.2mm STEEL NAIL MINIMUM.

PRODUCT NO: SIG BI-fold Door (100mm)

DATE: 29/07/14

DRAWING NO: SIG-BD-02-08

ISSUE: A

DRAWN: DJH


SCALE: 1 : 2

Bradnam's Windows and Doors Pty Ltd ABN 78 010 409 819 © 2014 All rights reserved.



**Bradnam's**  
windows & doors

## FIBRE CEMENT SHEET - JAMB DETAIL

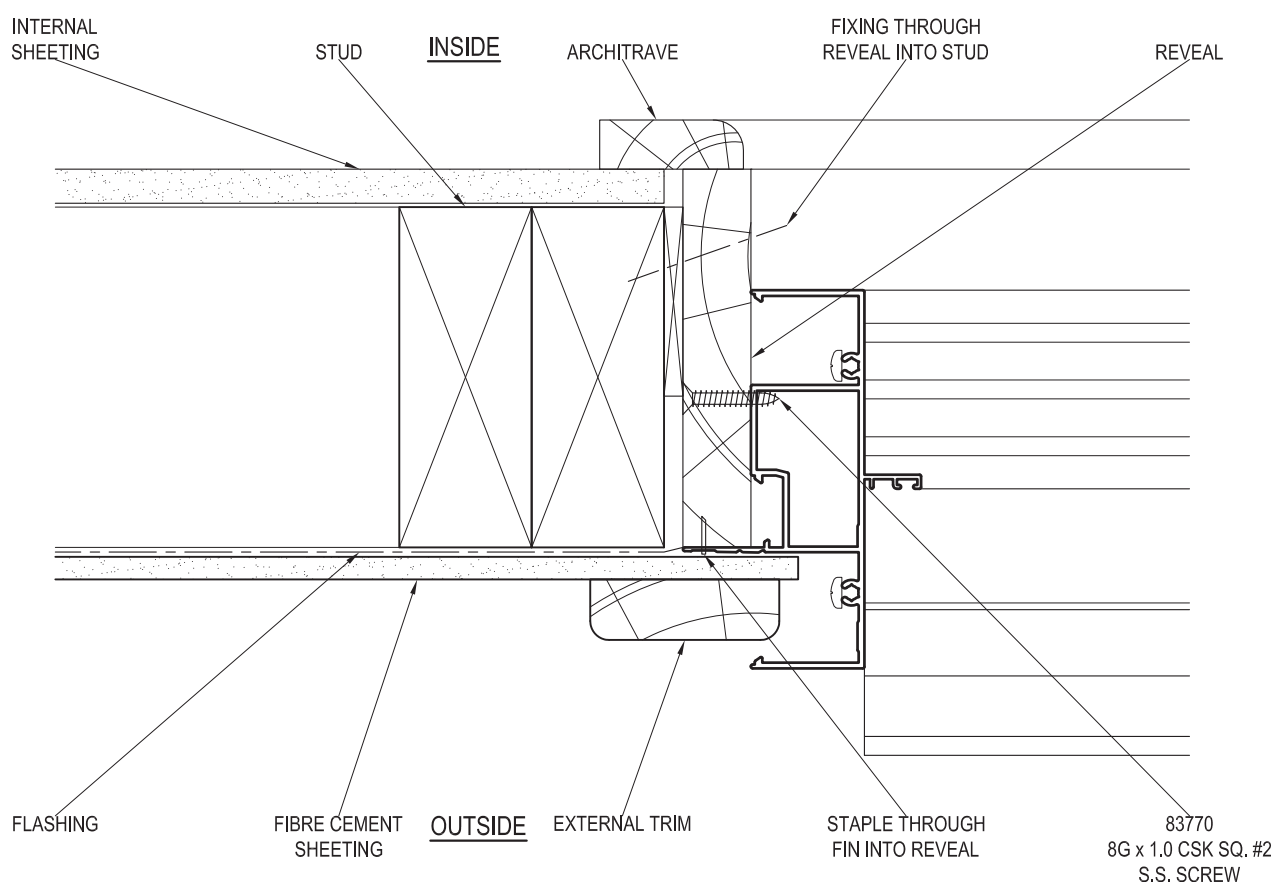

FIXINGS: UP TO AND INCLUDING SITE CLASSIFICATION OF N6, C4 (3.0 kPa) FIXINGS ARE TO BE AT 450mm CENTRE MAXIMUM. FOR SITUATIONS IN EXCESS OF THIS THE FIXINGS ARE TO BE AT 300mm CENTRES MAXIMUM. FIXING SIZE TO BE EQUIVALENT TO A Ø2.2mm STEEL NAIL MINIMUM.

PRODUCT NO: SIG BI-fold Door (100mm)

DATE: 29/07/14

DRAWING NO: SIG-BD-02-09

ISSUE: A

DRAWN: DJH


SCALE: 1 : 2

Bradnam's Windows and Doors Pty Ltd ABN 78 010 409 819 © 2014 All rights reserved.



**Bradnam's**  
windows & doors

## WEATHERBOARD & FIBRE CEMENT SHEET - TIMBER CONSTRUCTION FLOOR

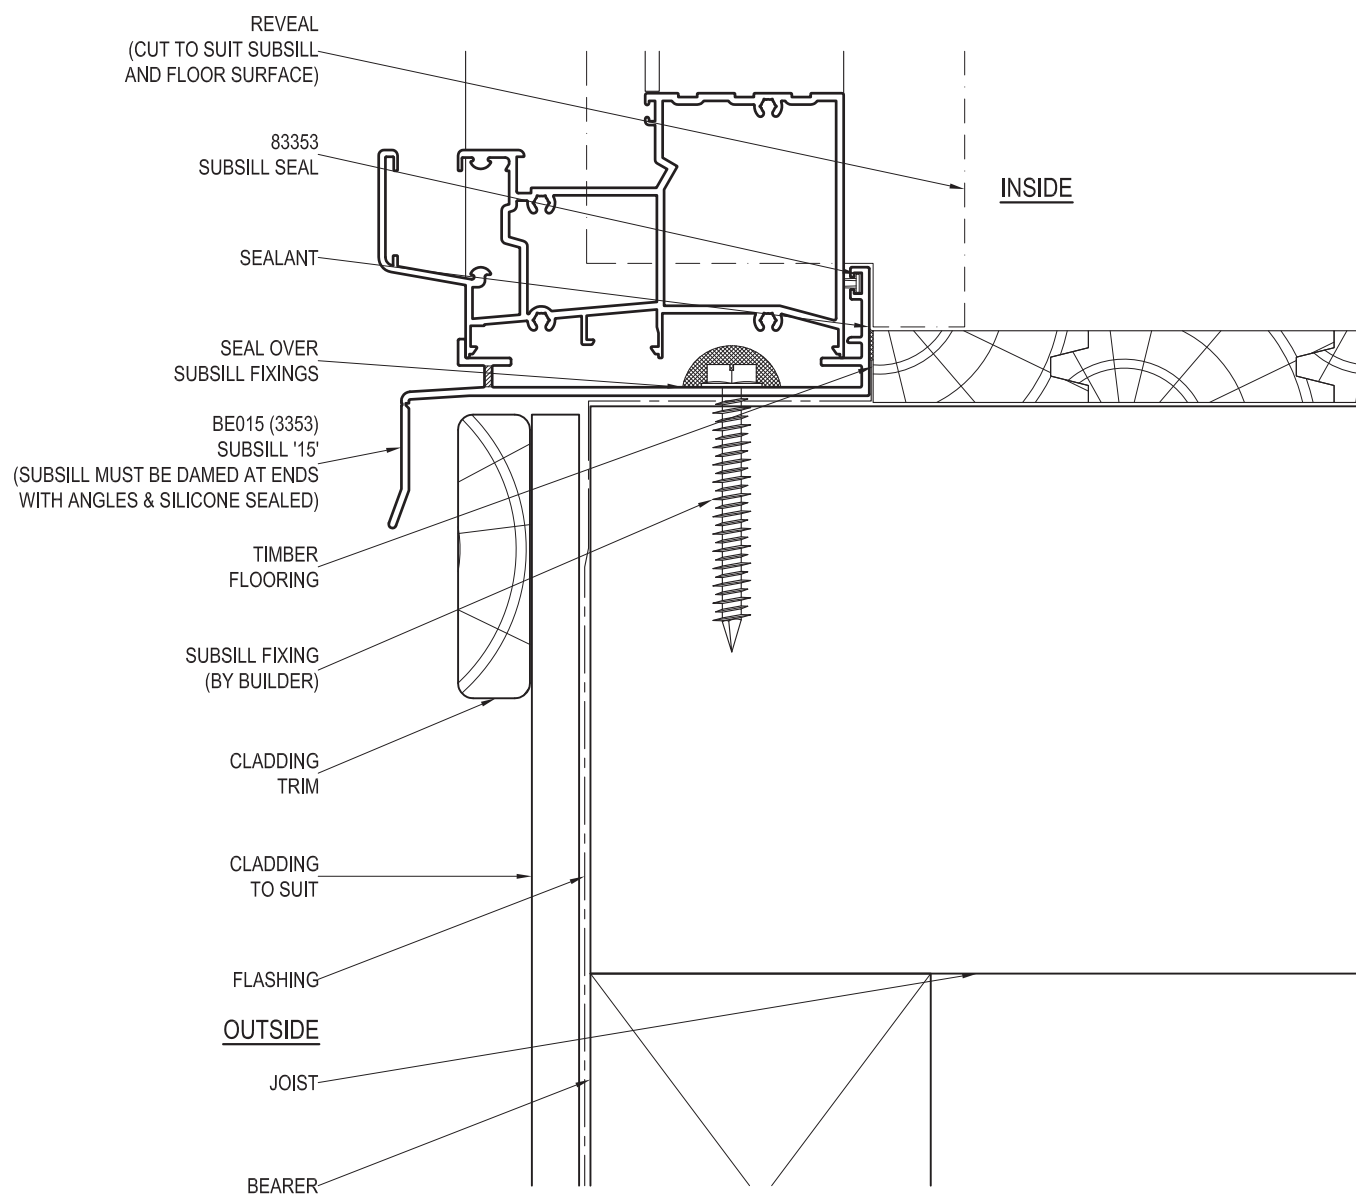

FIXINGS: UP TO AND INCLUDING SITE CLASSIFICATION OF N6, C4 (3.0 kPa) FIXINGS ARE TO BE AT 450mm CENTRE MAXIMUM. FOR SITUATIONS IN EXCESS OF THIS THE FIXINGS ARE TO BE AT 300mm CENTRES MAXIMUM. FIXING SIZE TO BE EQUIVALENT TO A Ø2.2mm STEEL NAIL MINIMUM.

PRODUCT NO: SIG BI-fold Door (100mm)

DATE: 29/07/14

DRAWING NO: SIG-BD-02-10

ISSUE: A

DRAWN: DJH


SCALE: 1 : 2

Bradnam's Windows and Doors Pty Ltd ABN 78 010 409 819 © 2014 All rights reserved.



**Bradnam's**  
windows & doors

## BLOCKWORK - HEAD DETAIL

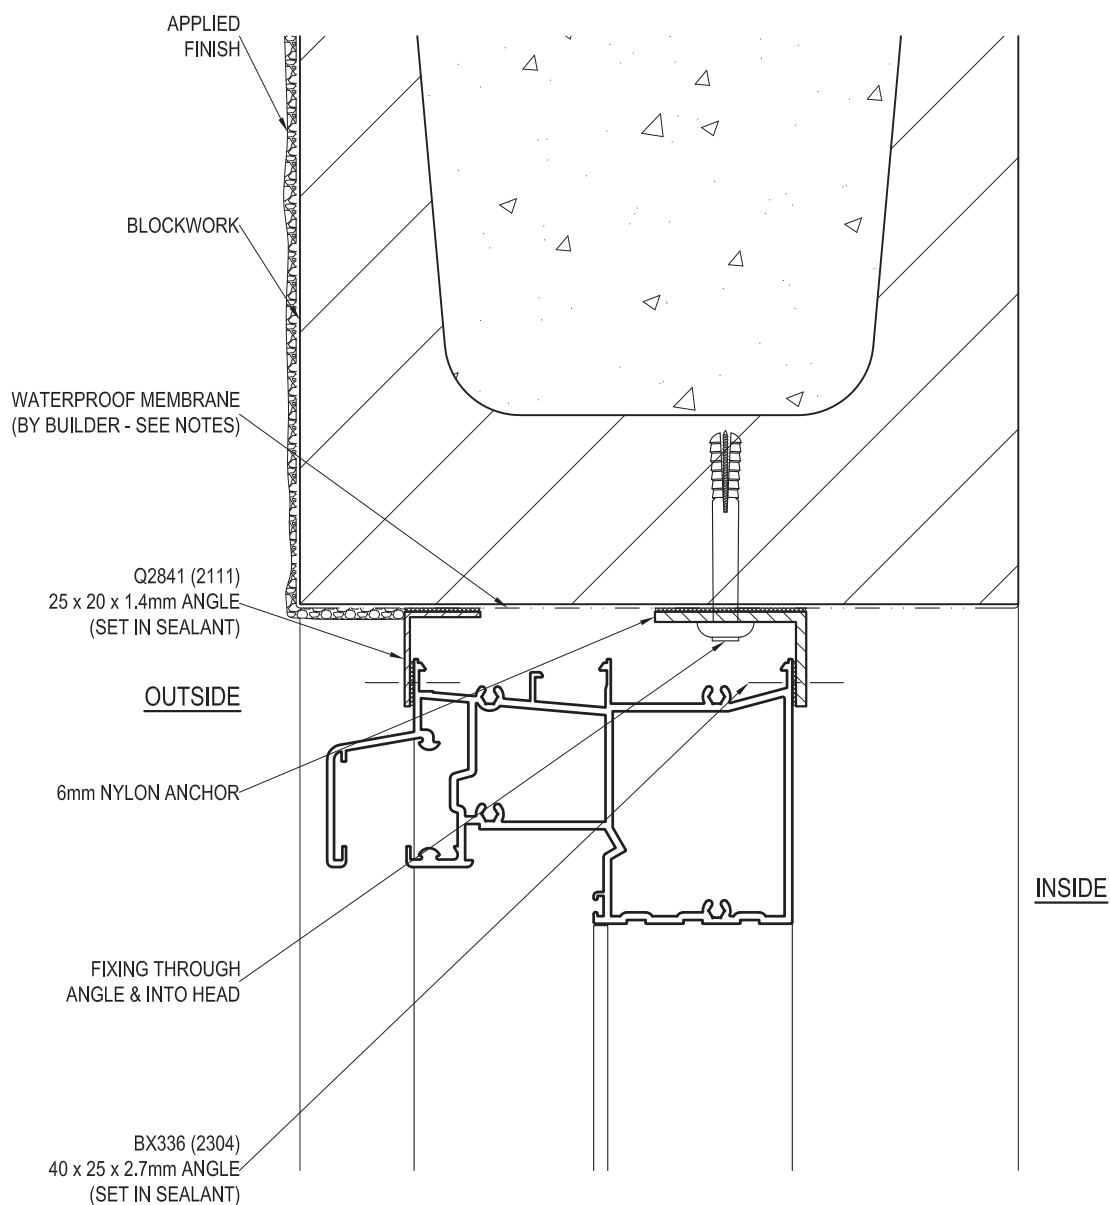

NOTE: SURFACE OF BLOCKS TO DOOR / WINDOW OPENING MUST BE TANKED WITH A SUITABLE SEALER TO PREVENT INGRESS OF MOISTURE. ENSURE MEMBRANE IS COMPATIBLE WITH A 1 PART POLYURETHANE SEALANT E.G. SIKAFLEX PRO 2HP.

FIXINGS: UP TO AND INCLUDING SITE CLASSIFICATION OF N6, C4 (3.0 kPa) FIXINGS ARE TO BE AT 450mm CENTRE MAXIMUM. FOR SITUATIONS IN EXCESS OF THIS THE FIXINGS ARE TO BE AT 300mm CENTRES MAXIMUM. FIXING SIZE TO BE EQUIVALENT TO A Ø2.2mm STEEL NAIL MINIMUM.

PRODUCT NO: SIG BI-fold Door (100mm)

DATE: 29/07/14

DRAWING NO: SIG-BD-02-11

ISSUE: A

DRAWN: DJH


SCALE: 1 : 2

Bradnam's Windows and Doors Pty Ltd ABN 78 010 409 819 © 2014 All rights reserved.



**Bradnam's**  
windows & doors

## BLOCKWORK - JAMB DETAIL

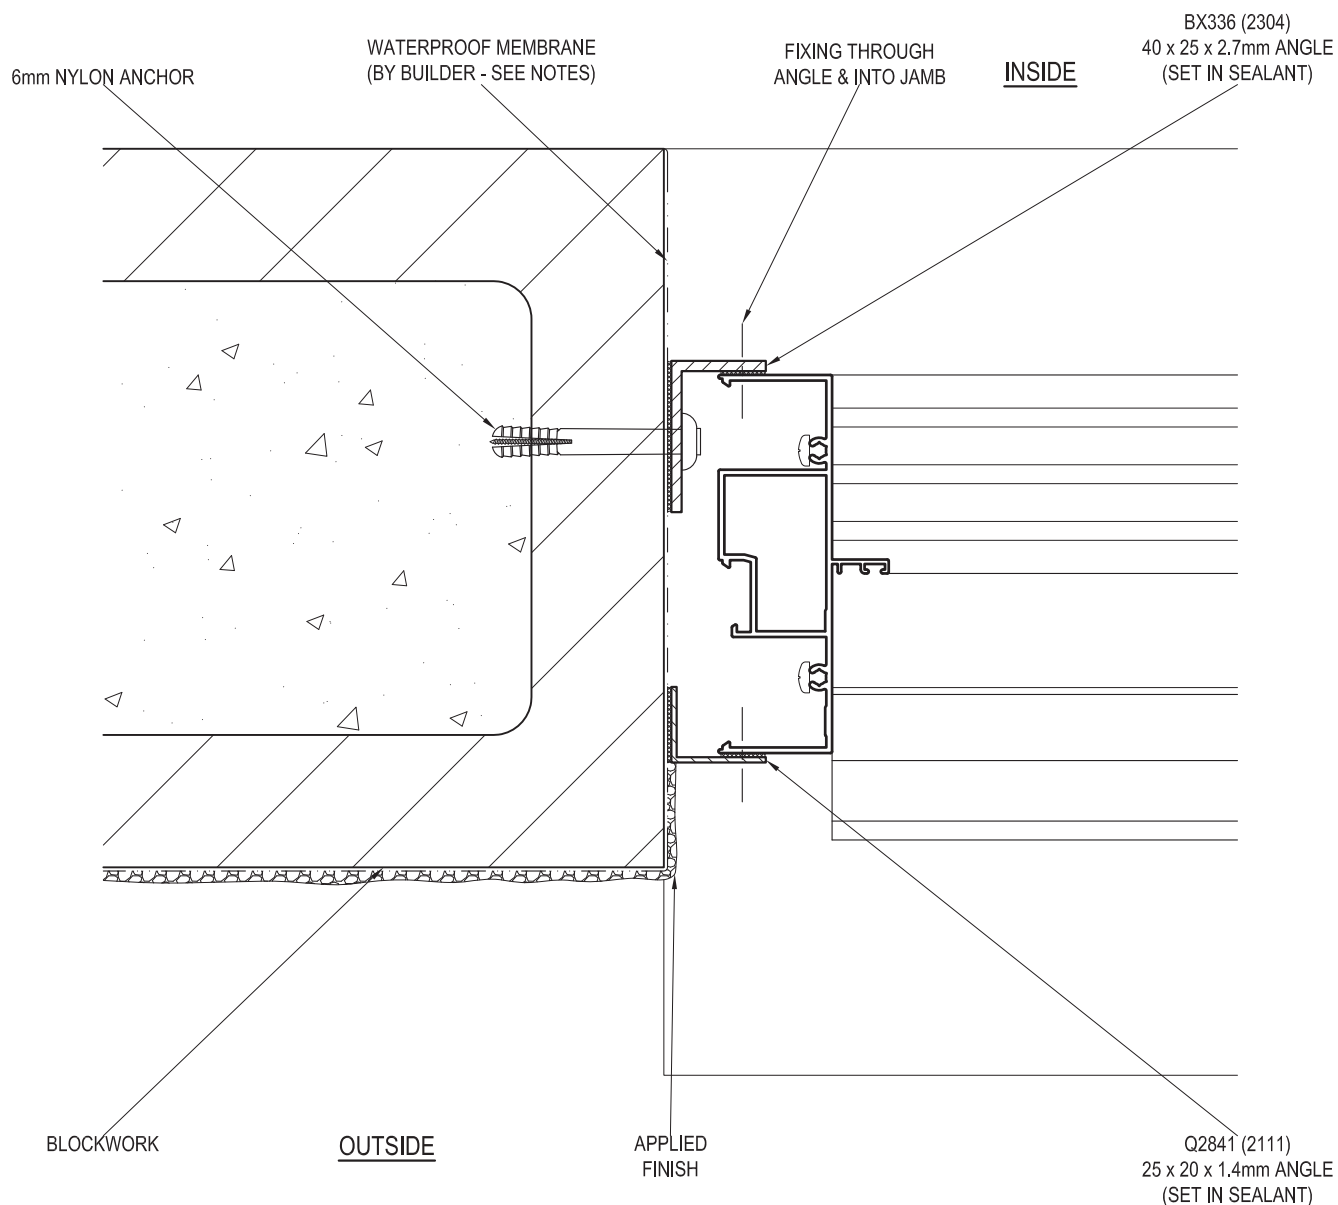

NOTE: SURFACE OF BLOCKS TO DOOR / WINDOW OPENING MUST BE TANKED WITH A SUITABLE SEALER TO PREVENT INGRESS OF MOISTURE. ENSURE MEMBRANE IS COMPATIBLE WITH A 1 PART POLYURETHANE SEALANT E.G. SIKAFLEX PRO 2HP.

FIXINGS: UP TO AND INCLUDING SITE CLASSIFICATION OF N6, C4 (3.0 kPa) FIXINGS ARE TO BE AT 450mm CENTRE MAXIMUM. FOR SITUATIONS IN EXCESS OF THIS THE FIXINGS ARE TO BE AT 300mm CENTRES MAXIMUM. FIXING SIZE TO BE EQUIVALENT TO A Ø2.2mm STEEL NAIL MINIMUM.

PRODUCT NO: SIG BI-fold Door (100mm)

DATE: 29/07/14

DRAWING NO: SIG-BD-02-12

ISSUE: A

DRAWN: DJH


SCALE: 1 : 2

Bradnam's Windows and Doors Pty Ltd ABN 78 010 409 819 © 2014 All rights reserved.



**Bradnam's**  
windows & doors

## BLOCKWORK - FLAT SLAB AT SILL

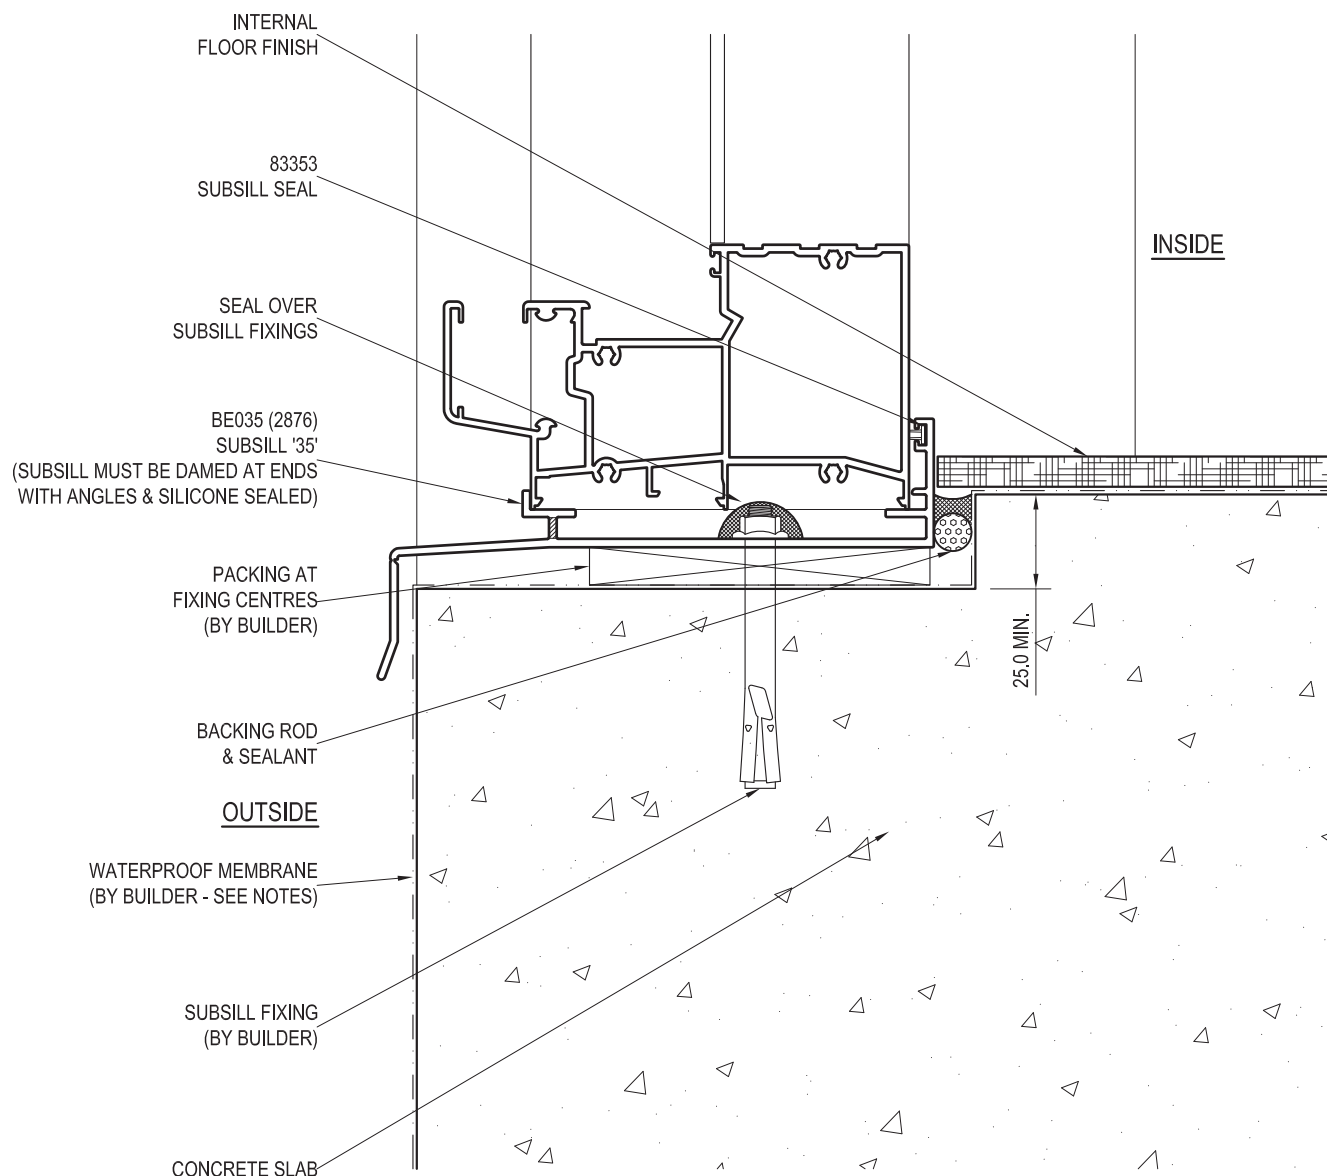

NOTE: ENSURE THAT ANY APPLIED FINISH DOES NOT RESTRICT DRAINAGE FROM UNDER THE SILL. SEAL COAT MUST OVERLAP END OF APPLIED FINISH TO SILL TANKING.

SURFACE OF BLOCKS TO DOOR / WINDOW OPENING MUST BE TANKED WITH A SUITABLE SEALER TO PREVENT INGRESS OF MOISTURE. ENSURE THAT THE SURFACES TO BE SEALED ARE SOUND, CLEAN, DRY AND FREE FROM ANY SURFACE CONTAMINANTS.

FIXING HOLES TO SILLS MUST BE FILLED WITH SEALANT PRIOR TO INSERTING FASTENERS TO RESTORE WATERPROOFING MEMBRANE. HEAD OF FASTENERS TO SILLS SHOULD BE SEALED OVER. SURFACE OF BLOCKS TO DOOR / WINDOW OPENING MUST BE TANKED WITH A SUITABLE SEALER TO PREVENT INGRESS OF MOISTURE.

FIXINGS: UP TO AND INCLUDING SITE CLASSIFICATION OF N6, C4 (3.0 kPa) FIXINGS ARE TO BE AT 450mm CENTRE MAXIMUM. FOR SITUATIONS IN EXCESS OF THIS THE FIXINGS ARE TO BE AT 300mm CENTRES MAXIMUM. FIXING SIZE TO BE EQUIVALENT TO A Ø2.2mm STEEL NAIL MINIMUM.

PRODUCT NO: SIG BI-fold Door (100mm)

DATE: 29/07/14

DRAWING NO: SIG-BD-02-13

ISSUE: A

DRAWN: DJH


SCALE: 1 : 2

Bradnam's Windows and Doors Pty Ltd ABN 78 010 409 819 © 2014 All rights reserved.



**Bradnam's**  
windows & doors

## BRICK VENEER - HEAD DETAIL - TOP HUNG

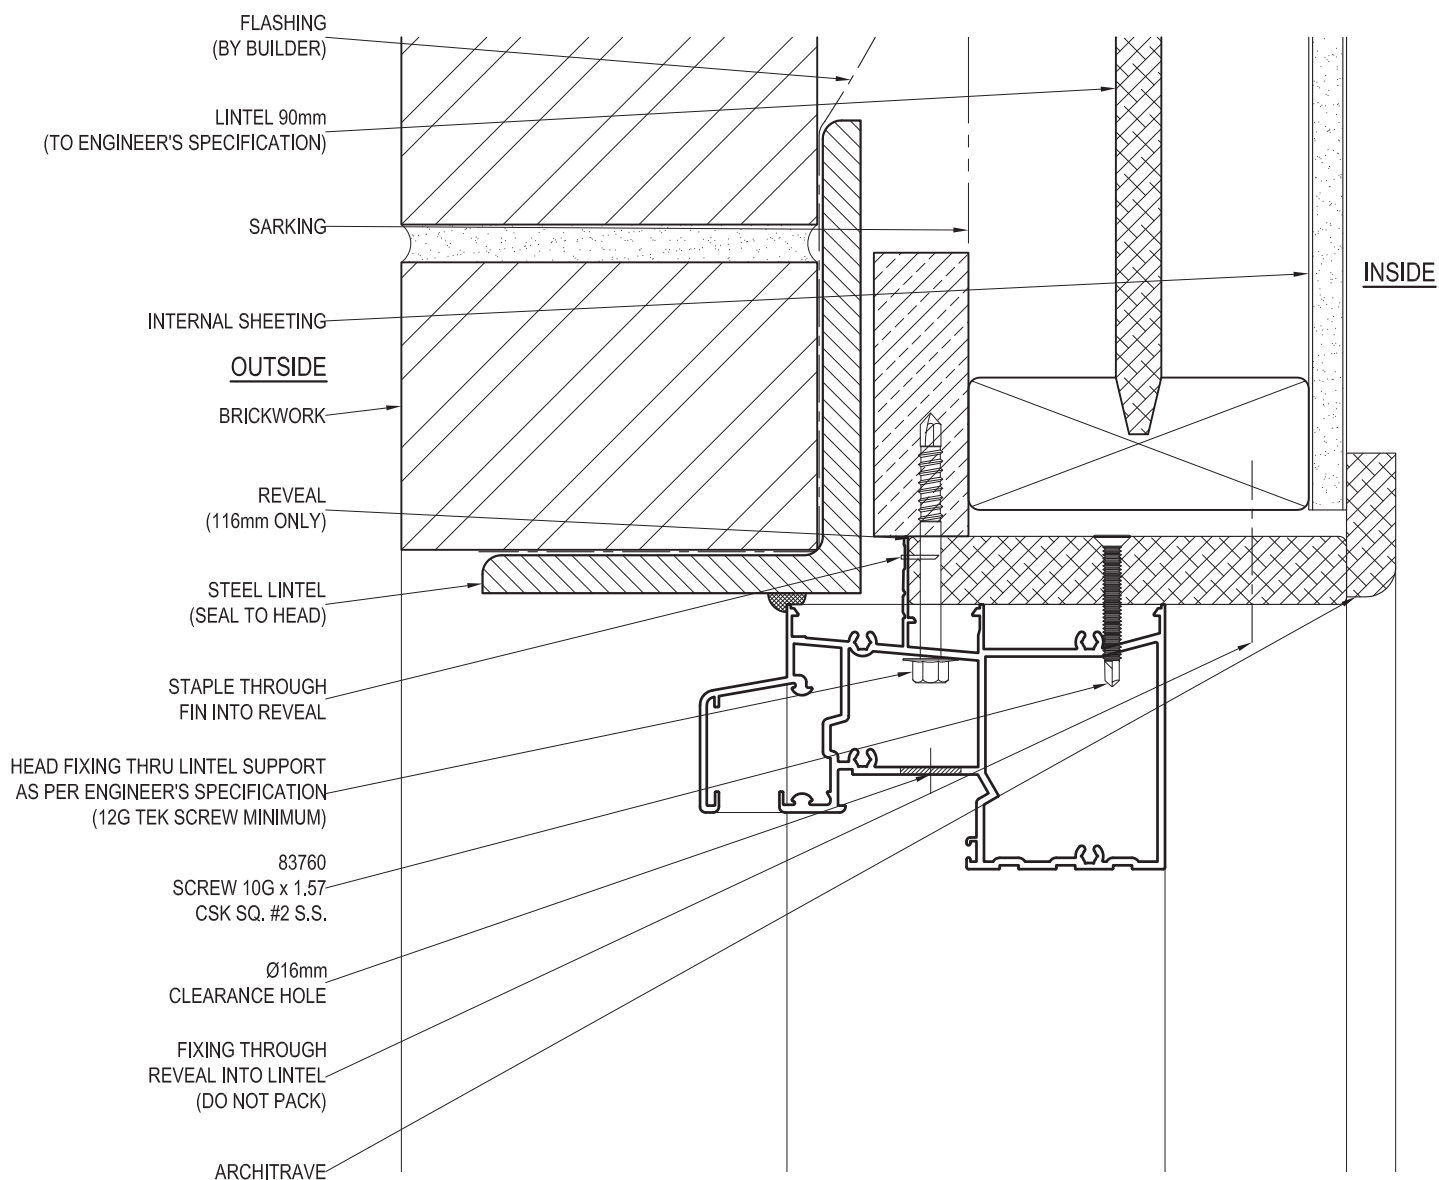

FIXINGS: UP TO AND INCLUDING SITE CLASSIFICATION OF N6, C4 (3.0 kPa) FIXINGS ARE TO BE AT 450mm CENTRE MAXIMUM. FOR SITUATIONS IN EXCESS OF THIS THE FIXINGS ARE TO BE AT 300mm CENTRES MAXIMUM. FIXING SIZE TO BE EQUIVALENT TO A Ø2.2mm STEEL NAIL MINIMUM.

PRODUCT NO: SIG BI-fold Door (100mm)

DATE: 29/07/14

DRAWING NO: SIG-BD-02-14

ISSUE: A

DRAWN: DJH

SCALE: 1 : 2

Bradnam's Windows and Doors Pty Ltd ABN 78 010 409 819 © 2014 All rights reserved.



**Bradnam's**  
windows & doors