



BRADNAM'S

BI-FOLD WINDOWS

PRODUCT INFORMATION

Product performance is subject to regional variations, design requirements and building codes. Performance parameters are independent of each other.

Images are for illustration purposes only and may not accurately represent the product. Bradnam's Windows & Doors reserves the right to change, alter or delete any aspect of this product without notice.

PERFORMANCE PARAMETERS

CONFIGURATIONS

STANDARD SIZES

COLONIAL BAR OPTIONS

REVEAL SETBACKS




PERFORMANCE PARAMETERS

	Signature	Commercial
Frame size	100mm	100mm
Maximum window height	2000mm	2000mm
Maximum window width	3610mm	8000mm
Maximum panel width	840mm	1000mm
Maximum panel weight	40kg	40kg
Maximum water rating	300Pa	300Pa
Maximum wind rating	2200Pa ULS	2200Pa ULS
Maximum glass thickness (single glazed)	12.38mm	12.38mm
Maximum glass thickness (double glazed)	24mm	24mm
Maximum acoustic rating	Rw34	Rw35


Note: Performance figures are independent of each other and subject to conditions. Contact a Bradnam's Windows & Doors representative to discuss your specific project requirements.

CONFIGURATIONS


Standard




220




440



422

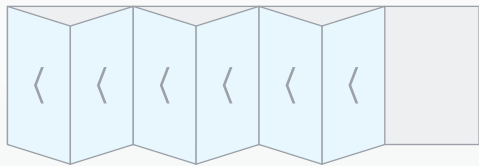

660

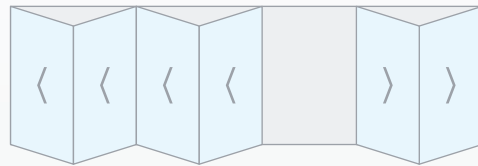

642

STANDARD SIZES – QUEENSLAND

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Bi-fold Windows may be subject to local variation or regulatory requirements.

+ Available Single or Double Glazed

STUD OPENING mm	960	1260	1860	2160	2460	2760	3060	2760	3060	3360	3660
-----------------	-----	------	------	------	------	------	------	------	------	------	------

FRAME SIZE mm	910	1210	1810	2110	2410	2710	3010	2710	3010	3310	3610
---------------	-----	------	------	------	------	------	------	------	------	------	------



Bi-Fold Numbering

eg: **422** (exterior view from left to right)

4	2	2
Total panels	No of panels opening to left	No of panels opening to right

STANDARD SIZES – NEW SOUTH WALES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Bi-fold Windows may be subject to local variation or regulatory requirements.

+ Available Single or Double Glazed

STUD OPENING mm	940	1270	1630	1870	2230	2470	2710	3070	2710	3070	3430	3650
FRAME SIZE mm	880	1210	1570	1810	2170	2410	2650	3010	2650	3010	3370	3590



Bi-Fold Numbering

eg: **422** (exterior view from left to right)


4	2	2
Total panels	No of panels opening to left	No of panels opening to right

STANDARD SIZES – VICTORIA

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Bi-fold Windows may be subject to local variation or regulatory requirements.

STUD OPENING mm	1390	1630	1750	2750	3170	3430	4370	4850	6010
-----------------	------	------	------	------	------	------	------	------	------

FRAME SIZE mm	1330	1570	1690	2690	3110	3370	4310	4790	5050
---------------	------	------	------	------	------	------	------	------	------

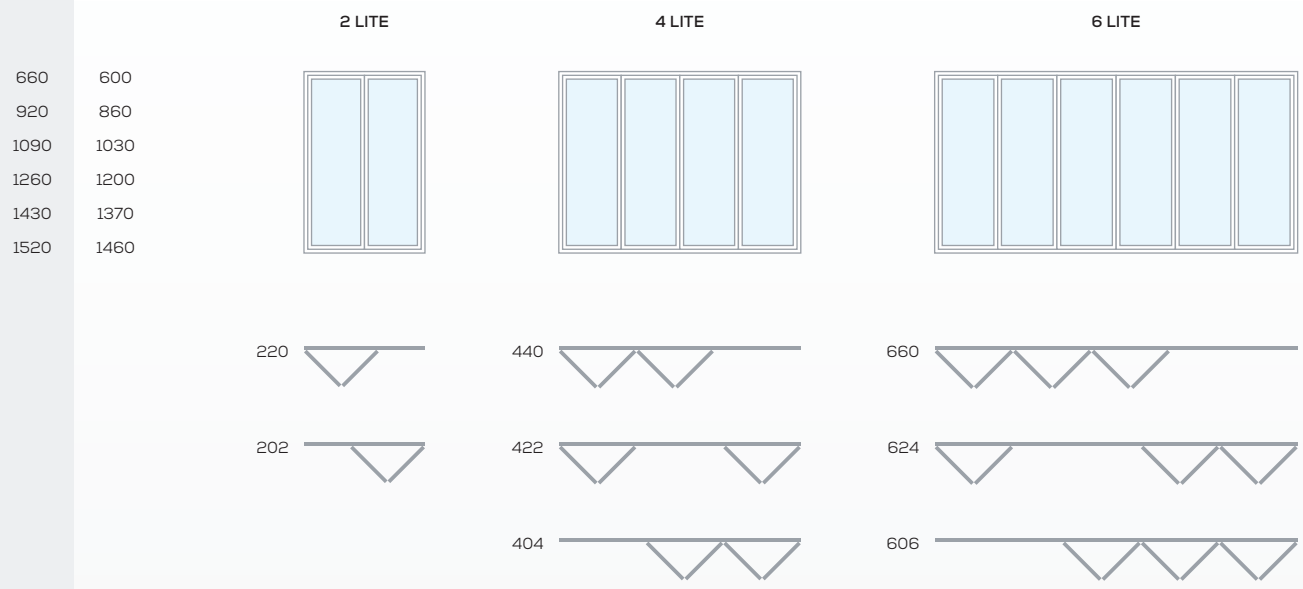


Bi-Fold Numbering

eg: **422** (exterior view from left to right)


4	2	2
Total panels	No of panels opening to left	No of panels opening to right

COLONIAL BAR OPTIONS


Design Options

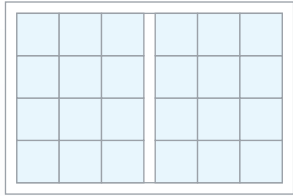


220
Traditional Colonial

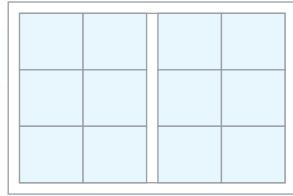


220
Australian Colonial



220
Highlander




220
Traditional Federation



220
Australian Federation

Types of Colonial Bar

Scale 5:1

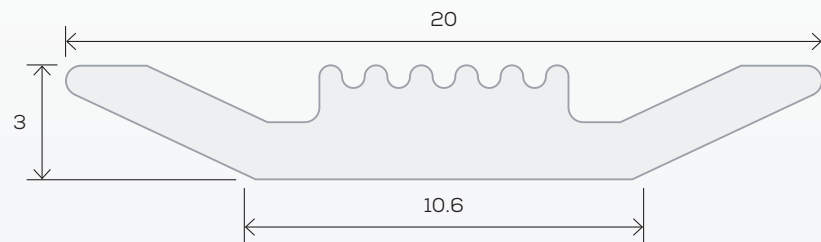


Raised




Flat

REVEAL SETBACKS

Note: Diagrams are not to scale

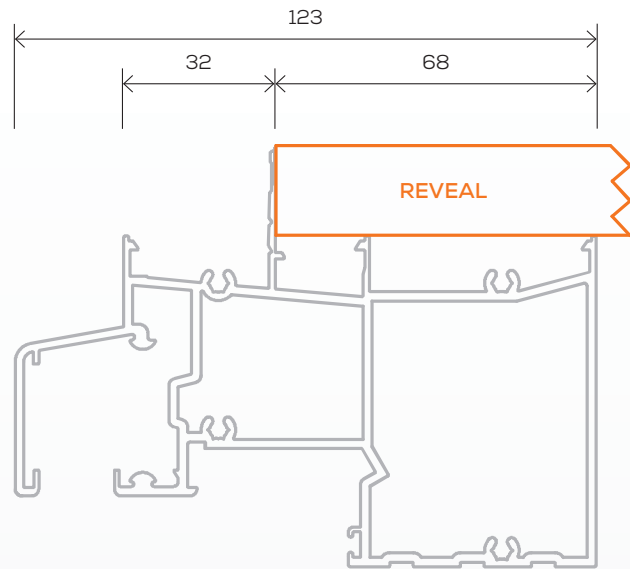

Signature Bi-fold Window (100mm)

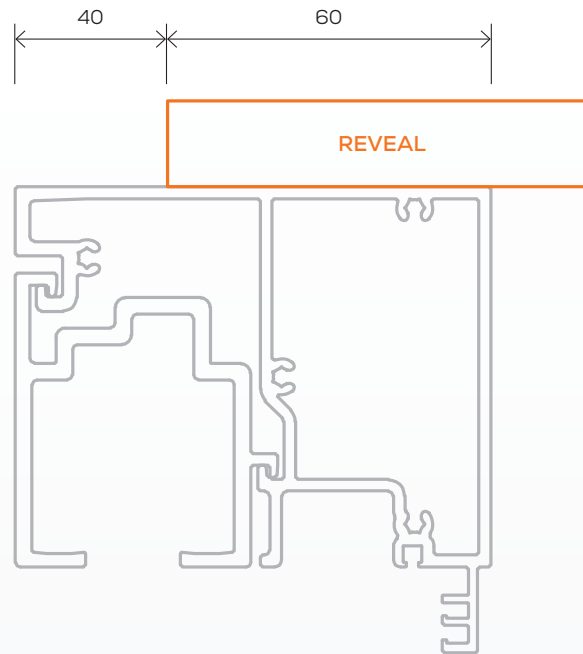

Commercial Bi-fold Window (100mm)