

# PIVOT DOORS

# PRODUCT INFORMATION

Product performance is subject to regional variations, design requirements and building codes. Performance parameters are independent of each other.

Images are for illustration purposes only and may not accurately represent the product. Bradnam's Windows & Doors reserves the right to change, alter or delete any aspect of this product without notice.

PERFORMANCE PARAMETERS

**CONFIGURATIONS** 

**COLONIAL BAR OPTIONS** 

SILL REBATES



### PERFORMANCE PARAMETERS

|   | Commercial |
|---|------------|
| Frame size                              | 100mm      |
| Maximum door height                     | 2700mm     |
| Maximum door width                      | 1500mm     |
| Maximum panel weight                    | 80kg       |
| Maximum water rating                    | OPa        |
| Maximum glass thickness (single glazed) | 13.52mm    |
| Maximum glass thickness (double glazed) | 24mm       |
| Lowest U-value (single glazed)          | 4.5        |
| Lowest U-value (double glazed)          | 3.2        |

Note: Performance figures are independent of each other and subject to conditions. Contact a Bradnam's Windows & Doors representative to discuss your specific project requirements.


# CONFIGURATIONS

#### Standard











# COLONIAL BAR OPTIONS


### **Design Options**









Australian Colonial



Highlander




Traditional Federation



Australian Federation

### Types of Colonial Bar

Scale 5:1

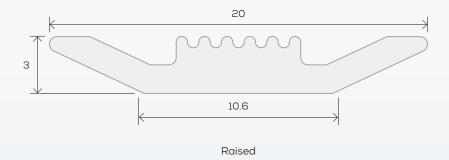





Flat


#### **Commercial Pivot Door 100**

2463 THRESHOLD STEPPED 25

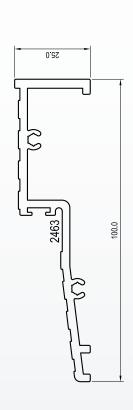

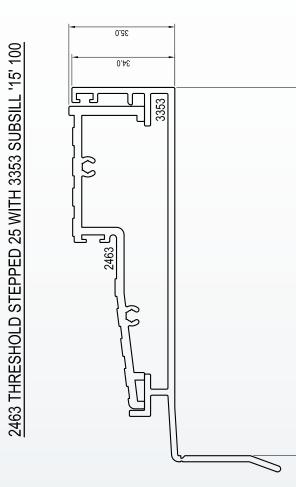


#### **Commercial Pivot Door 100**

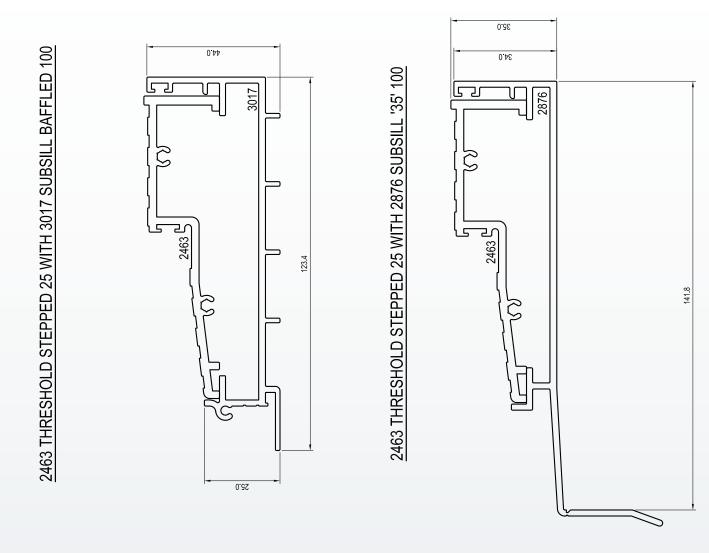


#### **Commercial Pivot Door 100**

2462 THRESHOLD DISABLED 100






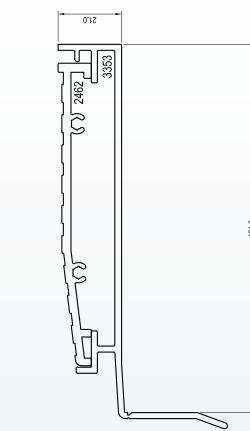


#### **Commercial Pivot Door 100**

2462 THRESHOLD DISABLED 100 WITH 3017 SUBSILL BAFFLED 100

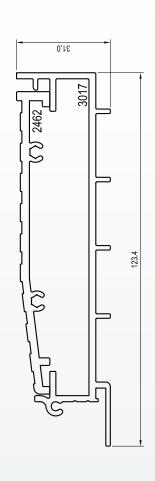



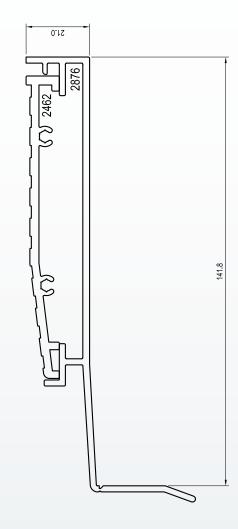

#### **Commercial Pivot Door 100**

