

BRADNAM'S

SIZE RANGE CATALOGUE


QUEENSLAND



Bradnam's
windows & doors

Hayward Developments


Design Styles WINDOWS AND DOORS



Sliding



Sliding



Double Hung



Awning



Casement




Fixed Lite



90° Bay Window



Transom Window



Louvre



Bi-fold




Hinged



135° Bay Window



Rake



Circle



Arch

Important Information

- All diagrams shown as viewed from the exterior.
- All measurements are in millimetres and are coded for ordering purposes.
- Height is always indicated first – sizes are finished sizes and do not include building-in fin.
- When ordering, please state left or right hand opening as viewed from the exterior of the building.
- Timber reveal lining is available.
- Timber reveal lining is not fitted to the door sill.
- Building in and prepared opening ties are available for both window and door products.
- All doors are fitted with safety glass and motif.
- Large windows may need motif. Confirm with a Bradnam's sales representative.
- Heavy duty sections may be used depending on the product size and required wind pressure.
- Non-standard sizes and configurations are available on request.

Colonial Bar Options



XO1218
Traditional Colonial



XO1218
Australian Colonial



XO1218
Highlander



XO1218
Traditional Federation



XO1218
Australian Federation

CHOOSING THE RIGHT KITCHEN WINDOWS

Where loved ones come together and delicious food is prepared daily, the kitchen truly is the heart of the home.

Windows play an essential role in this special space, both functionally and aesthetically. **The right window** should elevate the kitchen, allowing natural light and ventilation to emanate throughout your home.

With so many styles and sizes available, the right choice of window for your kitchen greatly depends on the design, space, needs and preferences. We understand that this can be a daunting decision, so Bradnam's have created a page on our website with deeper insight into our window offerings to assist in determining **which window works best for your space**.



SCAN CODE TO VIEW



AWNING WINDOWS

BI-FOLD WINDOWS

CASEMENT WINDOWS

FIXED WINDOWS

GAS STRUT WINDOWS

LOUVRE WINDOWS

SLIDING WINDOWS

Sliding Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Sliding Windows may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed (Signature version only)

| STUD OPENING mm | | 660 | 960 | 1260 | 1560 | 1860 | 2160 | 2460 | 2760 | 3060 |
|-----------------|------|---|---|---|--|---|---|---|---|---|
| FRAME SIZE mm | | 610 | 910 | 1210 | 1510 | 1810 | 2110 | 2410 | 2710 | 3010 |
| 650 | 600 |  |  |  |  |  |  |  |  |  |
| | | SF0606 | SF0609 | SF0612 | SF0615 | SF0618 | SF0621 | SFS0624 | SFS0627 | SFS0630 |
| 950 | 900 |  |  |  |  |  |  |  |  |  |
| | | SF0906 | SF0909 | SF0912 | SF0915 | SF0918 | SF0921 | SFS0924 | SFS0927 | SFS0930 |
| 1050 | 1000 |  |  |  |  |  |  |  |  |  |
| | | SF1006 | SF1009 | SF1012 | SF1015 | SF1018 | SF1021 | SFS1024 | SFS1027 | SFS1030 |
| 1250 | 1200 | |  |  |  |  |  |  |  |  |
| | | | SF1209 | SF1212 | SF1215 | SF1218 | SF1221 | SFS1224 | SFS1227 | SFS1230 |
| 1550 | 1500 | | |  |  |  |  |  |  |  |
| | | | | SF1512 | SF1515 | SF1518 | SF1521 | SFS1524 | SFS1527 | SFS1530 |
| 1850 | 1800 |  |  |  |  |  |  |  |  | |
| | | SF/F1809 | SF/F1812 | SF/FF1815 | SF/FF1818 | SF/FF1821 | SFS/FFF1824 | SFS/FFF1827 | SFS/FFF1830 | |
| 2150 | 2100 | |  |  |  |  |  |  |  | |
| | | | SF/F2112 | SF/FF2115 | SF/FF2118 | SF/FF2121 | SFS/FFF2124 | SFS/FFF2127 | SFS/FFF2130 | |

Viewed from exterior: **S** = Sliding Panel, **F** = Fixed Panel

Arrow indicates sliding direction viewed from exterior

Sliding Windows are also available in FS or FSSF configurations (minimum of 1810mm in width required)



Double Hung Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Double Hung Windows may be subject to local variation or regulatory requirements.



























































































+ Available Single or Double Glazed (Signature version only)

| STUD OPENING mm | | 660 | 960 | 1260 | 1560 | 1860 | 2160 | 2460 | 2760 | 3060 |
|-----------------|------|-------|-------|--------|--------|--------|---------|---------|---------|---------|
| FRAME SIZE mm | | 610 | 910 | 1210 | 1510 | 1810 | 2110 | 2410 | 2710 | 3010 |
| 950 | 900 | | | | | | | | | |
| | | D0906 | D0909 | D0912 | DD0915 | DD0918 | DDD0921 | DDD0924 | DDD0927 | DDD0930 |
| 1050 | 1000 | | | | | | | | | |
| | | D1006 | D1009 | D1012 | DD1015 | DD1018 | DDD1021 | DDD1024 | DDD1027 | DDD1030 |
| 1250 | 1200 | | | | | | | | | |
| | | D1206 | D1209 | D1212 | DD1215 | DD1218 | DDD1221 | DDD1224 | DDD1227 | DDD1230 |
| 1550 | 1500 | | | | | | | | | |
| | | D1506 | D1509 | DD1512 | DD1515 | DD1518 | DDD1521 | DDD1524 | DDD1527 | DDD1530 |
| 1850 | 1800 | | | | | | | | | |
| | | D1806 | D1809 | DD1812 | DD1815 | DD1818 | DDD1821 | DDD1824 | DDD1827 | |
| 2150 | 2100 | | | | | | | | | |
| | | D2106 | D2109 | DD2112 | DD2115 | DD2118 | DDD2121 | DDD2124 | DDD2127 | |

Awning Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Awning Windows may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed




































| STUD OPENING mm | | 660 | 960 | 1260 | 1560 | 1860 | 2160 | 2460 | 2760 | 3060 |
|-----------------|------|--|--|---|--|---|--|--|--|--|
| FRAME SIZE mm | | 610 | 910 | 1210 | 1510 | 1810 | 2110 | 2410 | 2710 | 3010 |
| 650 | 600 |  A0606 |  A0609 |  AA0612 |  AA0615 |  AA0618 |  AAA0621 |  AAA0624 |  AAA0627 |  AAA0630 |
| | 900 |  A0906 |  A0909 |  AA0912 |  AA0915 |  AA0918 |  AAA0921 |  AAA0924 |  AAA0927 |  AAA0930 |
| 1050 | 1000 |  A1006 |  A1009 |  AA1012 |  AA1015 |  AA1018 |  AAA1021 |  AAA1024 |  AAA1027 |  AAA1030 |
| | 1200 |  A1206 |  A1209 |  AA1212 |  AA1215 |  AA1218 |  AAA1221 |  AAA1224 |  AAA1227 |  AAA1230 |
| 1550 | 1500 |  A1506 |  A1509 |  AA1512 |  AA1515 |  AA1518 |  AAA1521 |  AAA1524 |  AAA1527 |  AAA1530 |
| | 1800 |  A/F1806 |  A/F1809 |  AA/F1812 |  AA/FF1815 |  AA/FF1818 |  AAA/FFF1821 |  AAA/FFF1824 |  AAA/FFF1827 |  AAA/FFF1830 |
| 1850 | 1200 |  A/F1806 |  A/F1809 |  AA/F1812 |  AA/FF1815 |  AA/FF1818 |  AAA/FFF1821 |  AAA/FFF1824 |  AAA/FFF1827 |  AAA/FFF1830 |
| | 600 |  A/F1806 |  A/F1809 |  AA/F1812 |  AA/FF1815 |  AA/FF1818 |  AAA/FFF1821 |  AAA/FFF1824 |  AAA/FFF1827 |  AAA/FFF1830 |
| 2150 | 1500 |  A/F2106 |  A/F2109 |  AA/F2112 |  AA/FF2115 |  AA/FF2118 |  AAA/FFF2121 |  AAA/FFF2124 |  AAA/FFF2127 |  AAA/FFF2130 |
| | 600 |  A/F2106 |  A/F2109 |  AA/F2112 |  AA/FF2115 |  AA/FF2118 |  AAA/FFF2121 |  AAA/FFF2124 |  AAA/FFF2127 |  AAA/FFF2130 |

Viewed from exterior: **A** = Operable Sash, **F** = Fixed Panel. All Awning Window sashes come standard with a chain winder. Standard sizes are not applicable to the Signature Gas Strut Awning Window.

Casement Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Casement Windows may be subject to local variation or regulatory requirements.

+ Available Single or Double Glazed

| STUD OPENING mm | | 660 | 960 | 1260 | 1560 | 1860 | 2160 | 2460 |
|--|------|--|---|---|--|---|---|---|
| FRAME SIZE mm | | 610 | 910 | 1210 | 1510 | 1810 | 2110 | 2410 |
| 650 950 1050 1250 1550 | 600 |  C0606 |  CC0609 |  CC0612 |  CCC0615 |  CCC0618 |  CCCC0621 |  CCCC0624 |
| | 900 |  C0906 |  CC0909 |  CC0912 |  CCC0915 |  CCC0918 |  CCCC0921 |  CCCC0924 |
| | 1000 |  C1006 |  CC1009 |  CC1012 |  CCC1015 |  CCC1018 |  CCCC1021 |  CCCC1024 |
| | 1200 |  C1206 |  CC1209 |  CC1212 |  CCC1215 |  CCC1218 |  CCCC1221 |  CCCC1224 |
| | 1500 |  C1506 |  CC1509 |  CC1512 |  CCC1515 |  CCC1518 |  CCCC1521 |  CCCC1524 |

Louvre Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Louvre Windows may be subject to local variation or regulatory requirements.

Louvre Information

- Using standard galleries (No extension pieces)
- L = Single Louvre Bay

Note:

- Blades can be glass, timber or aluminium
- Handle on LH side viewed from inside as standard

| Frame Widths (mm) | |
|-------------------|------|
| L | 610 |
| L | 910 |
| LL | 1210 |
| LL | 1510 |
| LL | 1810 |
| LLL | 2110 |
| LLL | 2410 |
| LLL | 2710 |

| 152mm Blades Stud Opening (mm) | 152mm Blades Frame Height (mm) | 102mm Blades Stud Opening (mm) | 102mm Blades Frame Height (mm) | Number of Blades |
|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|------------------|
| 412 | 362 | N/A | N/A | 2 |
| 552 | 502 | 399 | 349 | 3 |
| 691 | 641 | 488 | 438 | 4 |
| 831 | 781 | 577 | 527 | 5 |
| 971 | 921 | 666 | 616 | 6 |
| 1110 | 1060 | 755 | 705 | 7 |
| 1250 | 1200 | 844 | 794 | 8 |
| 1390 | 1340 | 933 | 883 | 9 |
| 1529 | 1479 | 1021 | 971 | 10 |
| 1669 | 1619 | 1110 | 1060 | 11 |
| 1809 | 1759 | 1199 | 1149 | 12 |
| 1949 | 1899 | 1288 | 1238 | 13 |
| 2088 | 2038 | 1377 | 1327 | 14 |
| 2228 | 2178 | 1466 | 1416 | 15 |
| 2368 | 2318 | 1555 | 1505 | 16 |
| 2507 | 2457 | 1644 | 1594 | 17 |
| 2647 | 2597 | 1733 | 1683 | 18 |
| 2787 | 2737 | 1822 | 1772 | 19 |
| 2926 | 2876 | 1910 | 1860 | 20 |
| 3076 | 3016 | 1999 | 1949 | 21 |
| N/A | N/A | 2088 | 2038 | 22 |
| N/A | N/A | 2177 | 2127 | 23 |
| N/A | N/A | 2266 | 2216 | 24 |
| N/A | N/A | 2355 | 2305 | 25 |
| N/A | N/A | 2444 | 2394 | 26 |
| N/A | N/A | 2533 | 2483 | 27 |
| N/A | N/A | 2622 | 2572 | 28 |
| N/A | N/A | 2711 | 2661 | 29 |
| N/A | N/A | 2799 | 2749 | 30 |

Bi-fold Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Bi-fold Windows may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed

| STUD OPENING mm | | 960 | 1260 | 1860 | 2160 | 2460 | 2760 | 3060 | 2760 | 3060 | 3360 | 3660 |
|-----------------|------|--------|------|--------|------|------|------|--------|------|------|------|------|
| FRAME SIZE mm | | 910 | 1210 | 1810 | 2110 | 2410 | 2710 | 3010 | 2710 | 3010 | 3310 | 3610 |
| | | 2 LITE | | 4 LITE | | | | 6 LITE | | | | |
| 650 | 600 | | | | | | | | | | | |
| 950 | 900 | | | | | | | | | | | |
| 1050 | 1000 | | | | | | | | | | | |
| 1250 | 1200 | | | | | | | | | | | |
| | 220 | | | | | | | | | | | |
| | 202 | | | | | | | | | | | |
| | 440 | | | | | | | | | | | |
| | 422 | | | | | | | | | | | |
| | 404 | | | | | | | | | | | |
| | 660 | | | | | | | | | | | |
| | 642 | | | | | | | | | | | |
| | 624 | | | | | | | | | | | |
| | 606 | | | | | | | | | | | |

Bi-Fold Numbering

eg: **422** (exterior view from left to right)

| 4 | 2 | 2 |
|--------------|------------------------------|-------------------------------|
| Total panels | No of panels opening to left | No of panels opening to right |


Bay Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Bay Windows may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed


90° Bay Window Setout

| | | | |
|-----------------|----------|---|--------------------------|
| Width of window | A | = | Slab dimension A – 300mm |
| Width of window | B | = | Slab dimension B – 150mm |
| Width of window | C | = | Slab dimension C – 150mm |

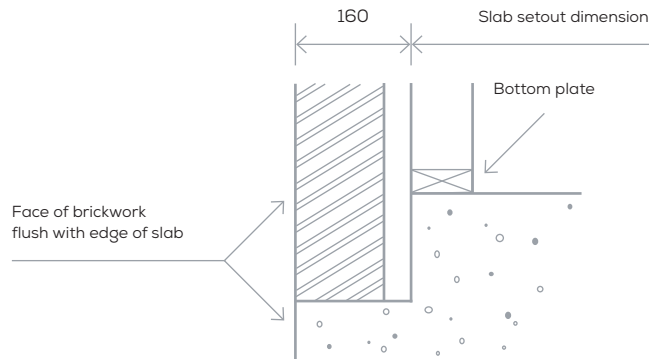

135° Bay Window Setout





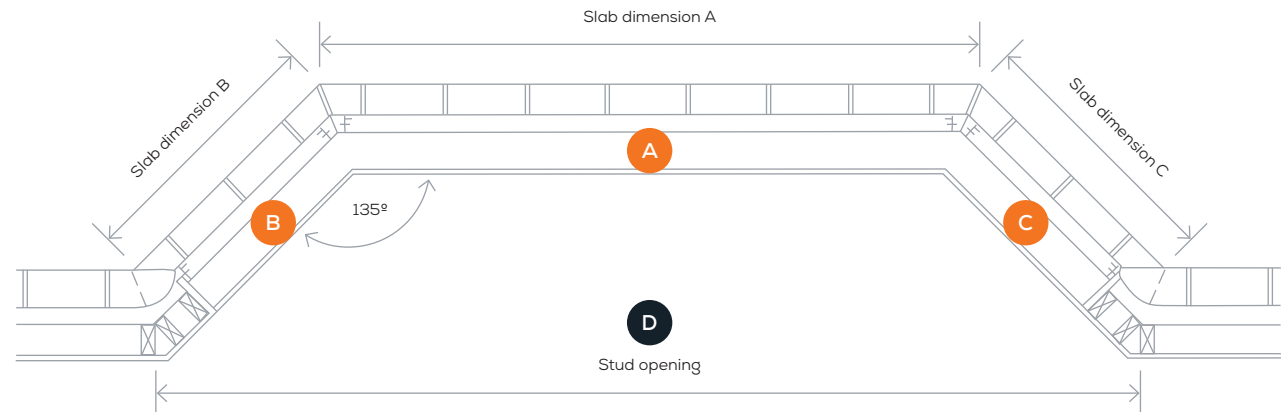







| | | | |
|-----------------|----------|---|---|
| Width of window | A | = | Slab dimension A – 140mm |
| Width of window | B | = | Slab dimension B – 160mm |
| Width of window | C | = | Slab dimension C – 160mm |
| Stud opening | D | = | $(2 \times \text{Slab dimension B} \times 0.7071) + \text{Slab dimension A} - 130\text{mm}$ where B and C are equal |



Sliding Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Sliding Doors may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed (Signature & Commercial versions only)

| STUD OPENING mm | | 1560 | 1860 | 2160 | 2460 | 2760 | | | |
|-----------------|------|---|---|--|---|---|---|--|--|
| | | FRAME SIZE mm | 1510 | 1810 | 2110 | 2410 | 2710 | | |
| 2130 | 2100 |  |  |  |  |  | Also available in FS configuration  | | |
| | | SF2115 | SF2118 | SF2121 | SF2124 | SF2127 | | | |
| 2430 | 2400 |  |  |  |  |  | | | |
| | | SF2415 | SF2418 | SF2421 | SF2424 | SF2427 | | | |
| STUD OPENING mm | | 2288 | 2738 | 3188 | 3638 | 4088 | | | |
| | | FRAME SIZE mm | 2238 | 2688 | 3138 | 3588 | 4038 | | |
| 2130 | 2100 |  |  |  |  |  | Also available in FSFL configuration  | | |
| | | FSFR2122 | FSFR2127 | FSFR2131 | FSFR2136 | FSFR2140 | | | |
| 2430 | 2400 |  |  |  |  |  | | | |
| | | FSFR2422 | FSFR2427 | FSFR2431 | FSFR2436 | FSFR2440 | | | |

Viewed from exterior: **S** = Sliding Panel, **F** = Fixed Panel Arrow indicates sliding direction viewed from exterior

Sliding Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Sliding Doors may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed (Signature & Commercial versions only)

| STUD OPENING mm | | 2288 | 2738 | 3188 | 3638 | 4088 | Also available in FSS configuration <div><div></div><div><</div><div><</div></div> |
|-----------------|------|--|--|--|--|--|---|
| FRAME SIZE mm | | 2238 | 2688 | 3138 | 3588 | 4038 | |
| 2130 | 2100 | <div><div>></div><div>></div></div> <div>SSF2122</div> | <div><div>></div><div>></div></div> <div>SSF2127</div> | <div><div>></div><div>></div></div> <div>SSF2131</div> | <div><div>></div><div>></div></div> <div>SSF2136</div> | <div><div>></div><div>></div></div> <div>SSF2140</div> | |
| | 2430 | 2400 | <div><div>></div><div>></div></div> <div>SSF2422</div> | <div><div>></div><div>></div></div> <div>SSF2427</div> | <div><div>></div><div>></div></div> <div>SSF2431</div> | <div><div>></div><div>></div></div> <div>SSF2436</div> | <div><div>></div><div>></div></div> <div>SSF2440</div> |

| STUD OPENING mm | | 3034 | 3634 | 4234 | 4834 | 5434 |
|-----------------|------|---|---|---|---|---|
| FRAME SIZE mm | | 2984 | 3584 | 4184 | 4784 | 5384 |
| 2130 | 2100 | <div><div><</div><div>></div></div> <div>FSSF2130</div> | <div><div><</div><div>></div></div> <div>FSSF2136</div> | <div><div><</div><div>></div></div> <div>FSSF2142</div> | <div><div><</div><div>></div></div> <div>FSSF2148</div> | <div><div><</div><div>></div></div> <div>FSSF2154</div> |
| | 2430 | 2400 | <div><div><</div><div>></div></div> <div>FSSF2430</div> | <div><div><</div><div>></div></div> <div>FSSF2436</div> | <div><div><</div><div>></div></div> <div>FSSF2442</div> | <div><div><</div><div>></div></div> <div>FSSF2448</div> |

Viewed from exterior: **S** = Sliding Panel, **F** = Fixed Panel Arrow indicates sliding direction viewed from exterior

Sliding Doors STANDARD SIZES


The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Sliding Doors may be subject to local variation or regulatory requirements.

+ Available Single or Double Glazed (Signature & Commercial versions only)

| STUD OPENING mm | | 4496 | 5396 | 6296 |
|-----------------|------|---|--|---|
| FRAME SIZE mm | | 4446 | 5346 | 6246 |
| 2130 | 2100 |  FSSSSF2144 |  FSSSSF2153 |  FSSSSF2162 |
| | 2400 |  FSSSSF2444 |  FSSSSF2453 |  FSSSSF2462 |

Viewed from exterior: **S** = Sliding Panel, **F** = Fixed Panel Arrow indicates sliding direction viewed from exterior

Types of Corner Sliding Doors

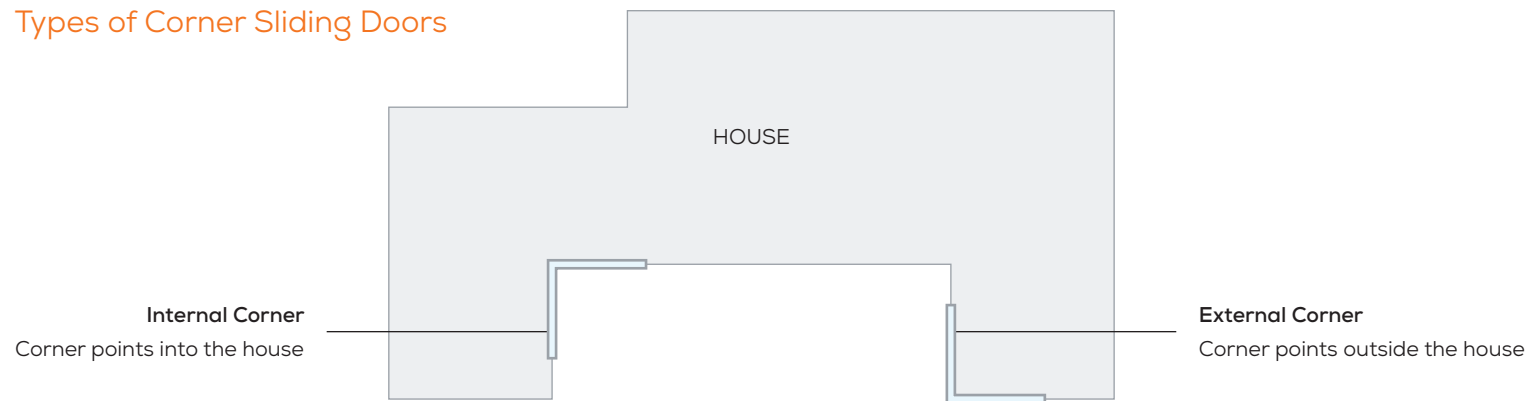


Bi-fold Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Bi-fold Doors may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed

● Indicates operable door leaf with external door handle for external access

| STUD OPENING mm | | 1650 | 2450 | 3250 | 4050 | 4850 |
|--|------|---|---|--|---|---|
| FRAME SIZE mm | | 1600 | 2400 | 3200 | 4000 | 4800 |
| | | 2 LITE | 3 LITE | 4 LITE | 5 LITE | 6 LITE |
| 2130 | 2100 |  |  |  |  |  |
| | 2430 |  |  |  |  |  |
| 2430 | 220 |  | 321  | 440  | 541  | 660  |
| | 202 |  | 312  | 431  | 532  | 651  |
| | | | 330  | 422  | 523  | 642  |
| | | | 303  | 413  | 514  | 633  |
| | | | | 404  | 550  | 624  |
| | | | | | 505  | 606  |
| | | | | | | 615  |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Bi-Fold Numbering | | | | | | |
| eg: 321 (exterior view from left to right) | | | | | | |
| | | 3 | 2 | 1 | | |
| | | Total panels | No of panels opening to left | No of panels opening to right | | |


Hinged Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Hinged Doors may be subject to local variation or regulatory requirements.

+ Available Single or Double Glazed


Hinged Door Information

- Standard door leaf widths are 620mm, 720mm, 820mm
- Maximum leaf size 870mm
- All doors to be supplied with sills
- Operable windows are available as side lites if required
- Hi lites are available subject to confirmation of structural performance

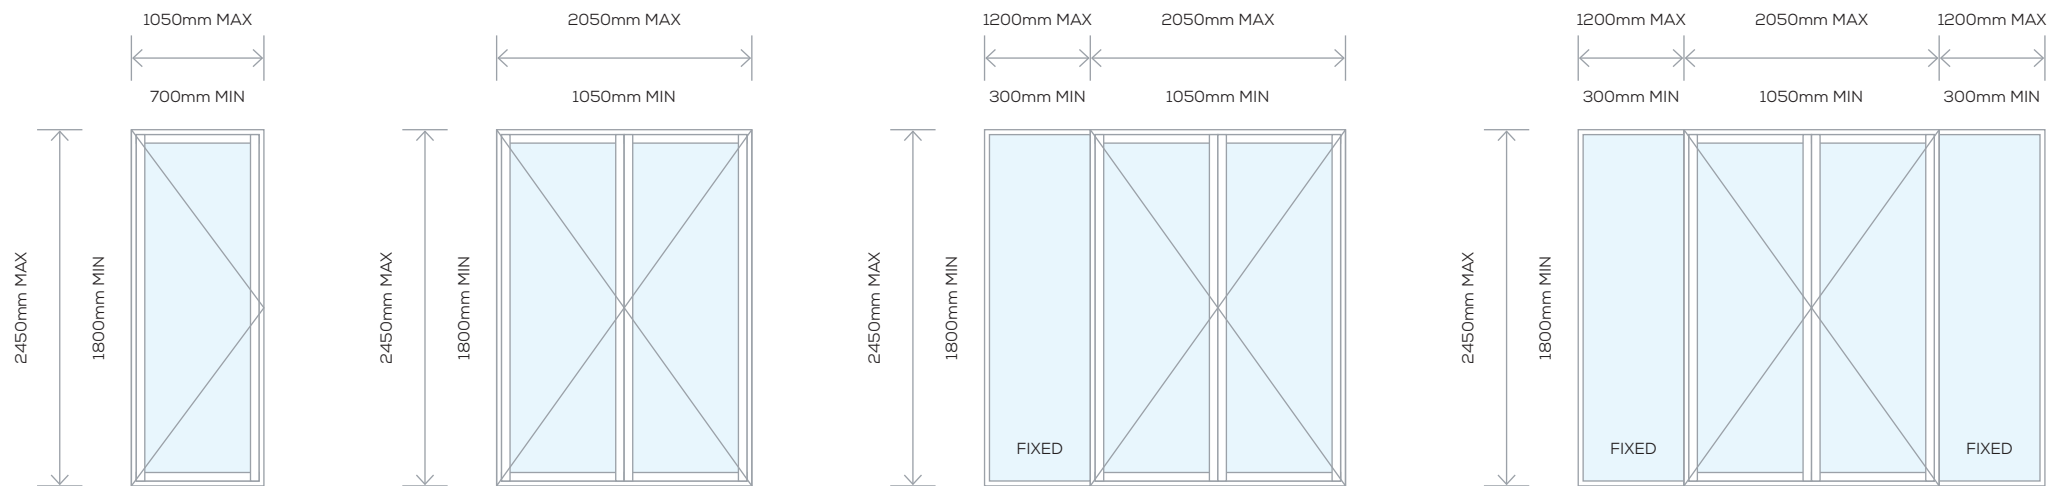



VISIT US ON SOCIAL MEDIA



WINDOWS & DOORS

INSECT & SECURITY SCREENS



Australian Owned & Made

Bradnam's products are proudly made in Australia and designed specifically to meet all Australian conditions.

Product availability, pricing, features, options, sizes, configurations and performance are subject to regional variations, design requirements and building codes.

Images are for illustration purposes only and may not accurately represent the product. Bradnam's Windows & Doors reserves the right to change, alter or delete any aspect of this product without notice.

We recommend visiting a Bradnam's showroom before ordering to view colour swatches, glass samples and actual products.



Bradnam's
windows & doors

Kevin Morris Builder

Bradnam's Windows and Doors . QBCC Act lic 58885
© Bradnam's Windows and Doors . v13 Feb 2024