

Bradnam's

Size Range Catalogue

Victoria




Bradnam's
windows & doors



Corbett Homes


Design Styles WINDOWS AND DOORS



Sliding



Sliding



Double Hung



Awning



Casement




Fixed Lite



90° Bay Window



Transom Window



Louvre



Bi-fold




French



135° Bay Window



Rake



Circle



Arch

Important information

- All diagrams shown as viewed from the exterior.
- All measurements are in millimetres and are coded for ordering purposes.
- Height is always indicated first – sizes are finished sizes and do not include building-in fin.
- When ordering, please state left or right hand opening as viewed from the exterior of the building.
- Timber reveal lining is available.
- Timber reveal lining is not fitted to the door sill.
- Large windows may need motif. Confirm with a Bradnam's sales representative.
- All doors are fitted with safety glass and motif.
- Large windows may need motif. Confirm with a Bradnam's sales representative.
- Heavy duty sections may be used depending on the product size and required wind pressure.
- All first floor windows will be restricted to only open 125mm unless a fall prevention screen is fitted.
- All windows onto a pool area will be restricted to open 100mm unless a fall prevention screen is fitted.

Colonial Bar options



SF1218
Traditional Colonial



SF1218
Australian Colonial



SF1218
Highlander



SF1218
Traditional Federation



SF1218
Australian Federation

Signature
Entrance
Door

Be
welcomed
home
in
Style

Sliding Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Sliding Windows may be subject to local variation or regulatory requirements.

STUD OPENING mm		670	910	1270	1510	1870	2230	2230	2470	2710	3070
FRAME SIZE mm		610	850	1210	1450	1810	2170	2170	2410	2650	3010
660	600										
		SF0606	SF0609	SF0612	SF0615	SF0618	SF0621	SFS0621	SFS0624	SFS0627	SFS0630
920	860										
		SF0906	SF0909	SF0912	SF0915	SF0918	SF0921	SFS0921	SFS0924	SFS0927	SFS0930
1090	1030										
		SF1006	SF1009	SF1012	SF1015	SF1018	SF1021	SFS1021	SFS1024	SFS1027	SFS1030
1260	1200										
		SF1209	SF1212	SF1215	SF1218	SF1221	SFS1221	SFS1224	SFS1227	SFS1230	
1520	1460										
		SF1409	SF1412	SF1415	SF1418	SF1421	SFS1421	SFS1424	SFS1427	SFS1430	
1860	1800										
		SF1809T	SF1812T	SF1815T	SF1818T	SF1821T	SFS1821T	SFS1824T	SFS1827T	SFS1830T	
2120	2060										
			SF2012T	SF2015T	SF2018T	SF2021T	SFS2021T	SFS2024T	SFS2027T	SFS2030T	













Viewed from exterior: **S** = Sliding Panel, **F** = Fixed Panel

Arrow indicates sliding direction

Also available in FS or FSSF configurations (minimum of 1810mm in width required)

Double Hung Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Double Hung Windows may be subject to local variation or regulatory requirements.

STUD OPENING mm		670	910	1270	1510	1870	2230	2470	2710	3070
FRAME SIZE mm		610	850	1210	1450	1810	2170	2410	2650	3010
920	860									
		D0906	D0909	D0912	DF0915	DF0918	DFD0921	DFD0924	DFD0927	DFD0930
1090	1030									
		D1006	D1009	D1012	DF1015	DF1018	DFD1021	DFD1024	DFD1027	DFD1030
1260	1200									
		D1206	D1209	D1212	DF1215	DF1218	DFD1221	DFD1224	DFD1227	DFD1230
1520	1460									
		D1406	D1409	D1412	DF1415	DF1418	DFD1421	DFD1424	DFD1427	DFD1430
1860	1800									
		D1806	D1809	DF1812	DF1815	DF1818	DFD1821	DFD1824	DFD1827	
2120	2060									
		D2006	D2009	DF2012	DF2015	DF2018	DFD2021	DFD2024	DFD2027	


















Viewed from exterior: **D** = Operable Sashes, **F** = Fixed

Arrow indicates sliding direction

Also available in FD and DD configurations

Awning Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Awning Windows may be subject to local variation or regulatory requirements.

STUD OPENING mm		670	910	1270	1510	1870	2230	2470	2710	3070
FRAME SIZE mm		610	850	1210	1450	1810	2170	2410	2650	3010
660	600	 A0606	 A0609	 AF0612	 AF0615	 AF0618	 AFA0621	 AFA0624	 AFA0627	 AFA0630
	860	 A0906	 A0909	 AF0912	 AF0915	 AF0918	 AFA0921	 AFA0924	 AFA0927	 AFA0930
1090	1030	 A1006	 A1009	 AF1012	 AF1015	 AF1018	 AFA1021	 AFA1024	 AFA1027	 AFA1030
	1200	 A1206	 A1209	 AF1212	 AF1215	 AF1218	 AFA1221	 AFA1224	 AFA1227	 AFA1230
1520	1460	 A1406	 A1409	 AF1412	 AF1415	 AF1418	 AFA1421	 AFA1424	 AFA1427	 AFA1430
	1800	 A1806T	 A1809T	 AF1812T	 AF1815T	 AF1818T	 AFA1821T	 AFA1824T	 AFA1827T	 AFA1830T
1860	1200	 A1806T	 A1809T	 AF1812T	 AF1815T	 AF1818T	 AFA1821T	 AFA1824T	 AFA1827T	 AFA1830T
	600	 A1806T	 A1809T	 AF1812T	 AF1815T	 AF1818T	 AFA1821T	 AFA1824T	 AFA1827T	 AFA1830T
2120	1460	 A2006T	 A2009T	 AF2012T	 AF2015T	 AF2018T	 AFA2021T	 AFA2024T	 AFA2027T	 AFA2030T
	600	 A2006T	 A2009T	 AF2012T	 AF2015T	 AF2018T	 AFA2021T	 AFA2024T	 AFA2027T	 AFA2030T

Viewed from exterior: **A** = Operable Sash, **F** = Fixed Panel

All Awning Window sashes come standard with a chain winder.

Also available in FA and AA configurations.

Gas Strut Windows STANDARD SIZES















The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Gas Strut Windows may be subject to local variation or regulatory requirements.

STUD OPENING mm		910	1270	1510	1870	2170
FRAME SIZE mm		850	1210	1450	1810	2110
920	860	 A0909	 A0912	 A0915	 A0918	 A0921
	1030	 A1009	 A1012	 A1015	 A1018	 A1021
	1200	 A1209	 A1212	 A1215	 A1218	 A1221
	1460	 A1509	 A1512	 A1515	 A1518	 A1521

Casement Windows STANDARD SIZES

ESSENTIAL

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Casement Windows may be subject to local variation or regulatory requirements.

STUD OPENING mm		670	910	1270	1510	1870	2230	2470
FRAME SIZE mm		610	850	1210	1450	1810	2170	2410
660	600	 C0606	 CF0609	 CF0612	 CFC0616	 CFC0618	 CFC0621	 CFC0624
	860	 C0906	 CF0909	 CF0912	 CFC0916	 CFC0918	 CFC0921	 CFC0924
1090	1030	 C1006	 CF1009	 CF1012	 CFC1016	 CFC1018	 CFC1021	 CFC1024
1260	1200	 C1206	 CF1209	 CF1212	 CFC1216	 CFC1218	 CFC1221	 CFC1224
1520	1460	 C1506	 CF1509	 CF1512	 CFC1516	 CFC1518	 CFC1521	 CFC1524
1860	1200	 C1806T	 CF1809T	 CF1812T	 CFC1816T	 CFC1818T	 CFC1821T	 CFC1824T
	600	 C1806T	 CF1809T	 CF1812T	 CFC1816T	 CFC1818T	 CFC1821T	 CFC1824T
2120	1460	 C2106T	 CF2109T	 CF2112T	 CFC2116T	 CFC2118T	 CFC2121T	 CFC2124T
	600	 C2106T	 CF2109T	 CF2112T	 CFC2116T	 CFC2118T	 CFC2121T	 CFC2124T








Maximum sash width is 850mm

Minimum sash width is 650mm

Casement Windows STANDARD SIZES

SIGNATURE LB

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Louvre Windows may be subject to local variation or regulatory requirements.

STUD OPENING mm		710	1270	1870	2230	2470
FRAME SIZE mm		650	1210	1810	2170	2410
1260	1200	 C1206	 CF1212	 CFC1218	 CFC1221	 CFC1224
	1460	 C1506	 CF1512	 CFC1518	 CFC1521	 CFC1524
1860	1800	 C1806T	 CF1812T	 CFC1818T	 CFC1821T	 CFC1824T
	2060	 C2106T	 CF2112T	 CFC2118T	 CFC2121T	 CFC2124T

Bi-fold Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Bi-fold Windows may be subject to local variation or regulatory requirements.

STUD OPENING mm		1390	1630	1750	2750	3170	3430	4370	4850	6010
FRAME SIZE mm		1330	1570	1690	2690	3110	3370	4310	4790	5050
		2 LITE			4 LITE			6 LITE		
660	600									
920	860									
1090	1030									
1260	1200									
1430	1370									
1520	1460									
		220			440			660		
		202			422			624		
					404			606		

Bi-Fold Numbering

eg: **422** (exterior view from left to right)


4	2	2
Total panels	No of panels opening to left	No of panels opening to right

Bay Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Bay Windows may be subject to local variation or regulatory requirements.


90° Bay Window setout

Width of window	A	=	Slab dimension A – 300mm
Width of window	B	=	Slab dimension B – 150mm
Width of window	C	=	Slab dimension C – 150mm

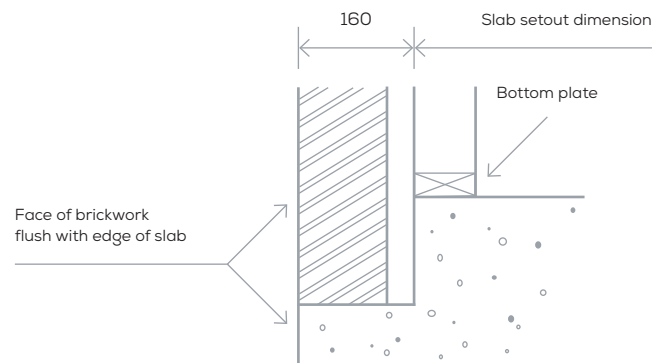





135° Bay Window setout

Width of window	A	=	Slab dimension A – 140mm
Width of window	B	=	Slab dimension B – 160mm
Width of window	C	=	Slab dimension C – 160mm
Stud opening	D	=	$(2 \times \text{Slab dimension B} \times 0.7071) + \text{Slab dimension A} - 130\text{mm}$ where B and C are equal
Depth of Bay window	E	=	$\text{Slab dimension B or C} \times 0.7071$

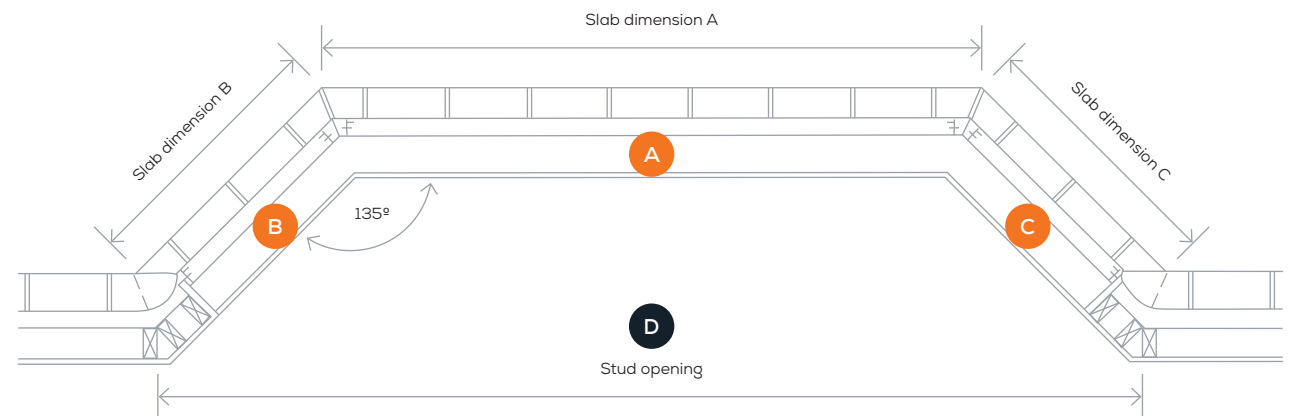

Sliding Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Sliding Doors may be subject to local variation or regulatory requirements.












STUD OPENING mm		1510	1870	2230	2470	2770	
FRAME SIZE mm		1450	1810	2170	2410	2710	
2140	2100						Also available in FS configuration
		SF2115	SF2118	SF2122	SF2124	SF2127	
2440	2400						
		SF2415	SF2418	SF2421	SF2424	SF2427	
STUD OPENING mm		2208	2748	3288	3648	4098	
FRAME SIZE mm		2148	2688	3228	3588	4038	
2140	2100						Also available in FSFL configuration
		FSFR2122	FSFR2127	FSFR2132	FSFR2136	FSFR2140	
2440	2400						
		FSFR2422	FSFR2427	FSFR2432	FSFR2436	FSFR2440	

Viewed from exterior: **S** = Sliding Panel, **F** = Fixed Panel

Arrow indicates sliding direction

Sliding Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Sliding Doors may be subject to local variation or regulatory requirements.







STUD OPENING mm		2208	2748	3288	3648	4098	
FRAME SIZE mm		2148	2688	3228	3588	4038	
2140	2100						Also available in FSS configuration
		SSF2122	SSF2127	SSF2132	SSF2136	SSF2140	
2440	2400						
		SSF2422	SSF2427	SSF2432	SSF2436	SSF2440	
STUD OPENING mm		2924	3644	4364	4844	5444	
FRAME SIZE mm		2864	3584	4304	4784	5384	
2140	2100						
		FSSF2129	FSSF2136	FSSF2143	FSSF2148	FSSF2154	
2440	2400						
		FSSF2429	FSSF2436	FSSF2443	FSSF2448	FSSF2454	

Viewed from exterior: **S** = Sliding Panel, **F** = Fixed Panel

Arrow indicates sliding direction

Sliding Doors STANDARD SIZES

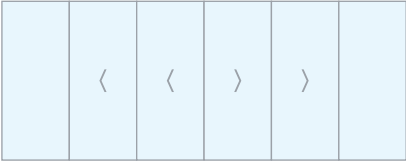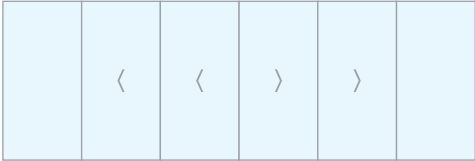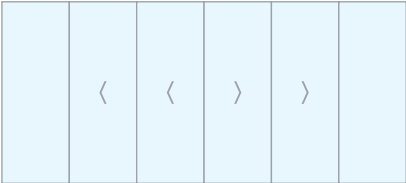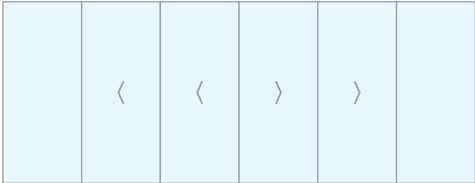The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Sliding Doors may be subject to local variation or regulatory requirements.

STUD OPENING mm		4326	5406	6306
FRAME SIZE mm		4266	5346	6246
2140	2100	 FSSSSF2143	 FSSSSF2153	 FSSSSF2162
	2400	 FSSSSF2443	 FSSSSF2453	 FSSSSF2462

Viewed from exterior: **S** = Sliding Panel, **F** = Fixed Panel Arrow indicates sliding direction

Corner Sliding Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Corner Sliding Doors may be subject to local variation or regulatory requirements.



Signature 100mm Corner Sliding Door

Available 2100mm or 2400mm high

Note: Choose 1 size from each column to make a Corner Sliding Door

Internal			
Signature SD100 Door <u>with</u> handle		Signature SD100 Door <u>no</u> handle	
Door Width	Handing	Door Width	Handing
1476	2 Lite	1494	2 Lite
1716	2 Lite	1734	2 Lite
2076	2 Lite	2094	2 Lite
2316	2 Lite	2334	2 Lite

External			
Signature SD100 Door <u>with</u> handle		Signature SD100 Door <u>no</u> handle	
Door Width	Handing	Door Width	Handing
1640	2 Lite	1660	2 Lite
1880	2 Lite	1900	2 Lite
2240	2 Lite	2260	2 Lite
2480	2 Lite	2500	2 Lite

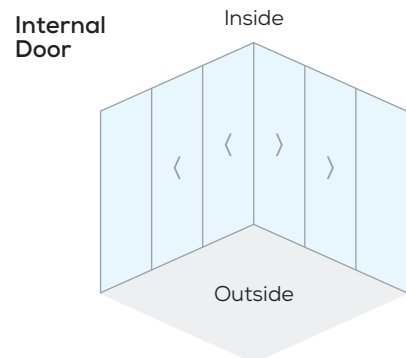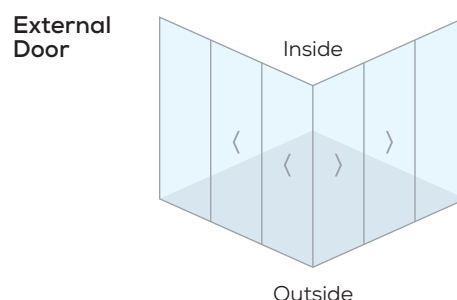

Signature 166mm Corner Sliding Door

Available 2100mm or 2400mm high

Note: Choose 1 size from each column to make a Corner Sliding Door
Cannot pair 2 Lite with another 2 Lite

Internal			
Signature SD166 Door <u>with</u> handle		Signature SD166 Door <u>no</u> handle	
Door Width	Handing	Door Width	Handing
1410	2 Lite	1427	2 Lite
1650	2 Lite	1667	2 Lite
2010	2 Lite	2027	2 Lite
2250	2 Lite	2267	2 Lite
2169	3 Lite	2187	3 Lite
2529	3 Lite	2547	3 Lite
3069	3 Lite	3087	3 Lite
3429	3 Lite	3447	3 Lite






External			
Signature SD166 Door <u>with</u> handle		Signature SD166 Door <u>no</u> handle	
Door Width	Handing	Door Width	Handing
1706	2 Lite	1726	2 Lite
1946	2 Lite	1966	2 Lite
2306	2 Lite	2326	2 Lite
2546	2 Lite	2566	2 Lite
2466	3 Lite	2484	3 Lite
2826	3 Lite	2844	3 Lite
3366	3 Lite	3384	3 Lite
3726	3 Lite	3744	3 Lite

Check with your Bradnam's representative to confirm the stud and brick opening
Some configurations cannot be screened

Bi-fold Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Bi-fold Doors may be subject to local variation or regulatory requirements.

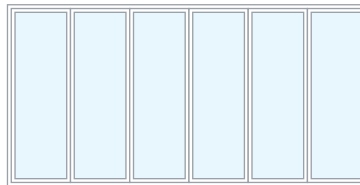● Indicates operable door leaf with external door handle for external access

STUD OPENING mm		1390	1630	1750	1870	2390	2590	2750	3170	3430	3170	3650	4270	4370	4850	5110	
FRAME SIZE mm		1330	1570	1690	1810	2330	2530	2690	3110	3370	3110	3590	4210	4310	4790	5050	
		2 LITE		3 LITE		4 LITE		5 LITE		6 LITE							
2140	2100																
	2400																
2440	220			321 		440 		550 		660 							
	202			312 		431 		505 		651 							
						422 				633 							
						413 				624 							
						404 				606 							
										615 							

Bi-Fold numbering

eg: **321** (exterior view from left to right)

3	2	1
Total panels	No of panels opening to left	No of panels opening to right

Corner Bi-fold Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Corner Bi-fold Doors may be subject to local variation or regulatory requirements.

Signature 100mm Corner Bi-fold Door

Available 2100mm or 2400mm high

Note: Choose 2 sizes from this column to make a Corner Bi-fold Door

Internal


Signature Bi-fold Door	
Door Width	Handing
1547	3 Lite
1667	3 Lite
1787	3 Lite
2307	3 Lite
2482	3 Lite
2667	5 Lite
3087	5 Lite
3347	5 Lite
3567	5 Lite
4177	5 Lite
4287	5 Lite
4767	7 Lite
5027	7 Lite

Note: Choose 2 sizes from this column to make a Corner Bi-fold Door


External

Signature Bi-fold Door	
Door Width	Handing
1593	3 Lite
1713	3 Lite
1833	3 Lite
2353	3 Lite
2528	3 Lite
2713	5 Lite
3133	5 Lite
3393	5 Lite
3613	5 Lite
4223	5 Lite
4333	5 Lite
4813	7 Lite
5073	7 Lite

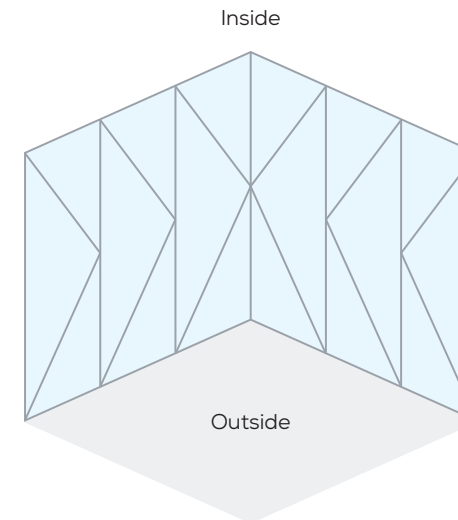Internal Door



External Door

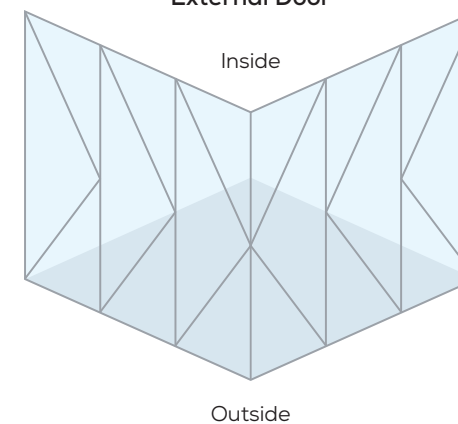


Check with your Bradnam's representative to confirm the stud and brick opening

French Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. French Doors may be subject to local variation or regulatory requirements.

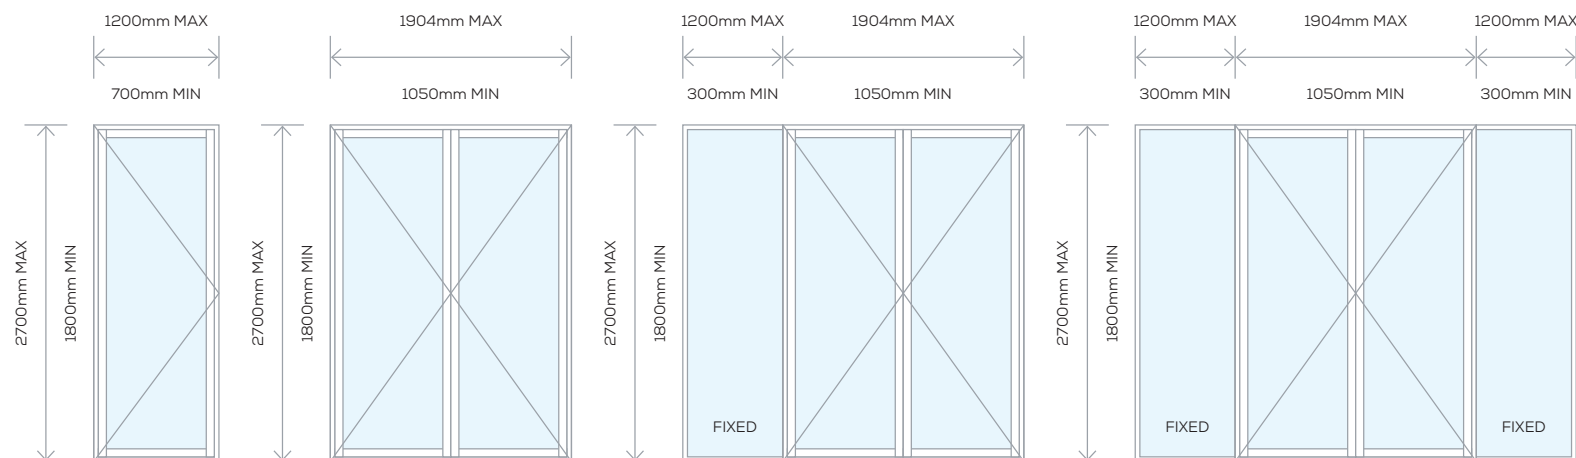
Standard configurations



French Door information

- Operable windows are available as side lites if required
- Hi lites are available subject to confirmation of structural performance

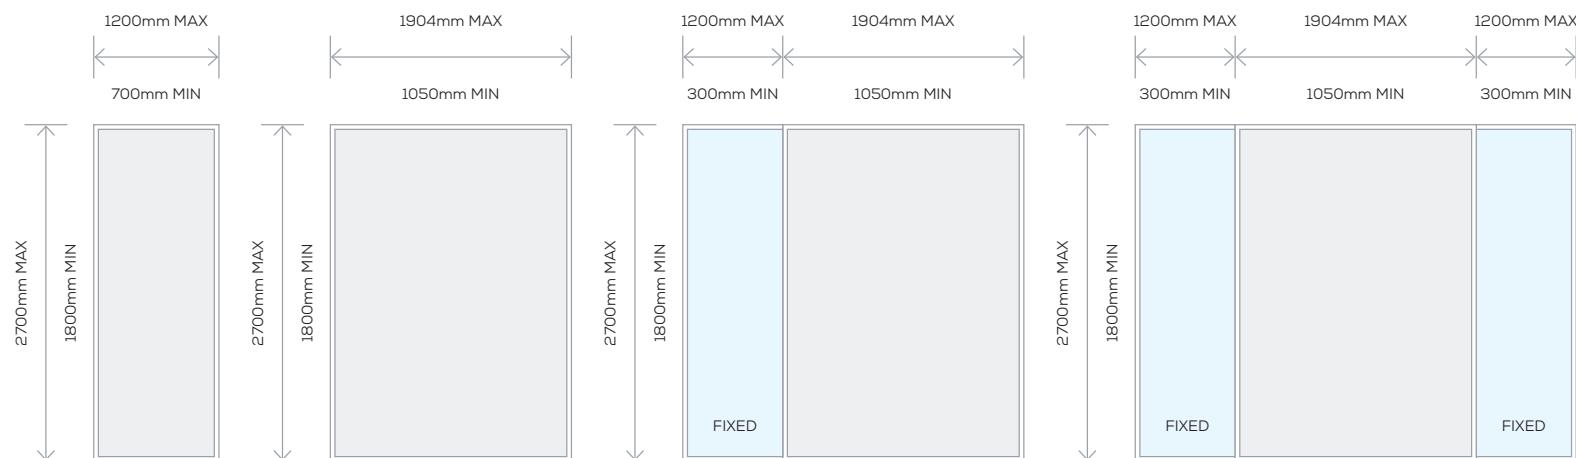Frame only configurations



Signature Entrance Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Entrance Doors may be subject to local variation or regulatory requirements.

Low Profile Sill


STUD OPENING mm		938	1038	1138	1318	1764	1964
FRAME SIZE mm		878	978	1078	1258	1704	1904
2140	2100						
		820 Sash	920 Sash	1020 Sash	1200 Sash	2 x 820 Sash	2 x 920 Sash
2440	2400						
		820 Sash	920 Sash	1020 Sash	1200 Sash	2 x 820 Sash	2 x 920 Sash

Standard Sill

STUD OPENING mm		938	1038	1138	1318	1764	1964
FRAME SIZE mm		878	978	1078	1258	1704	1904
2147	2107						
		820 Sash	920 Sash	1020 Sash	1200 Sash	2 x 820 Sash	2 x 920 Sash
2447	2407						
		820 Sash	920 Sash	1020 Sash	1200 Sash	2 x 820 Sash	2 x 920 Sash



Visit us on social media



WINDOWS & DOORS

INSECT & SECURITY SCREENS



Australian made and owned

Bradnam's products are proudly made in Australia and designed specifically to meet all Australian conditions.

Product availability, pricing, features, options, sizes, configurations and performance are subject to regional variations, design requirements and building codes.

Images are for illustration purposes only and may not accurately represent the product. Bradnam's Windows & Doors reserves the right to change, alter or delete any aspect of this product without notice.

We recommend visiting a Bradnam's showroom before ordering to view colour swatches, glass samples and actual products.



Bradnam's Windows and Doors . QBCC Act lic 58885

© Bradnam's Windows and Doors . v14 Oct 2026

 **Bradnam's**
windows & doors

Boutique Homes