



BRADNAM'S


SIZE RANGE CATALOGUE

QUEENSLAND



Bradnam's
windows & doors


Design Styles WINDOWS AND DOORS



Sliding



Sliding



Double Hung



Awning



Casement




Fixed Lite



90° Bay Window



Transom Window



Louvre



Bi-fold




Hinged



135° Bay Window



Rake



Circle



Arch

Important Information

- All diagrams shown as viewed from the exterior.
- All measurements are in millimetres and are coded for ordering purposes.
- Height is always indicated first – sizes are finished sizes and do not include building-in fin.
- When ordering, please state left or right hand opening as viewed from the exterior of the building.
- Timber reveal lining is available.
- Timber reveal lining is not fitted to the door sill.
- All doors are fitted with safety glass and motif.
- Large windows may need motif. Confirm with a Bradnam's sales representative.
- Heavy duty sections may be used depending on the product size and required wind pressure.
- All first floor windows will be restricted to only open 125mm unless a fall prevention screen is fitted.

Colonial Bar Options



XO1218
Traditional Colonial



XO1218
Australian Colonial



XO1218
Highlander



XO1218
Traditional Federation



XO1218
Australian Federation

BENEFITS OF DOUBLE GLAZED WINDOWS & DOORS

It's a well-known fact that windows and doors are a pivotal element in determining a home's design.

They establish a crucial link with the outside world, usher in abundant natural light and airflow, and ultimately enhance the atmosphere of the space.

Whilst some homeowners may opt for a more budget-friendly single-glazed option, let's delve into some of the core reasons why advantages await those who choose to double glaze their windows and doors.




























SCAN CODE TO VIEW

www.bradnams.com.au/benefits-of-double-glazing-windows/

Sliding Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Sliding Windows may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed

STUD OPENING mm		660	960	1260	1560	1860	2160	2460	2760	3060
FRAME SIZE mm		610	910	1210	1510	1810	2110	2410	2710	3010
650	600									
		SF0606	SF0609	SF0612	SF0615	SF0618	SF0621	SFS0624	SFS0627	SFS0630
950	900									
		SF0906	SF0909	SF0912	SF0915	SF0918	SF0921	SFS0924	SFS0927	SFS0930
1050	1000									
		SF1006	SF1009	SF1012	SF1015	SF1018	SF1021	SFS1024	SFS1027	SFS1030
1250	1200									
			SF1209	SF1212	SF1215	SF1218	SF1221	SFS1224	SFS1227	SFS1230
1550	1500									
				SF1512	SF1515	SF1518	SF1521	SFS1524	SFS1527	SFS1530
1850	1800									
			SF/F1809	SF/F1812	SF/FF1815	SF/FF1818	SF/FF1821	SFS/FFF1824	SFS/FFF1827	SFS/FFF1830
2150	2100									
				SF/F2112	SF/FF2115	SF/FF2118	SF/FF2121	SFS/FFF2124	SFS/FFF2127	SFS/FFF2130

Viewed from exterior: **S** = Sliding Panel, **F** = Fixed Panel

Arrow indicates sliding direction















Also available in FS or FSSF configurations (minimum of 1810mm in width required)



Double Hung Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Double Hung Windows may be subject to local variation or regulatory requirements.











+ Available Single or Double Glazed (Signature version only)

STUD OPENING mm		660	960	1260	1560	1860	2160	2460	2760	3060
FRAME SIZE mm		610	910	1210	1510	1810	2110	2410	2710	3010
950	900									
		D0906	D0909	D0912	DD0915	DD0918	DDD0921	DDD0924	DDD0927	DDD0930
1050	1000									
		D1006	D1009	D1012	DD1015	DD1018	DDD1021	DDD1024	DDD1027	DDD1030
1250	1200									
		D1206	D1209	D1212	DD1215	DD1218	DDD1221	DDD1224	DDD1227	DDD1230
1550	1500									
		D1506	D1509	DD1512	DD1515	DD1518	DDD1521	DDD1524	DDD1527	DDD1530
1850	1800									
		D1806	D1809	DD1812	DD1815	DD1818	DDD1821	DDD1824	DDD1827	
2150	2100									
		D2106	D2109	DD2112	DD2115	DD2118	DDD2121	DDD2124	DDD2127	

Awning Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Awning Windows may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed


STUD OPENING mm		660	960	1260	1560	1860	2160	2460	2760	3060
FRAME SIZE mm		610	910	1210	1510	1810	2110	2410	2710	3010
650	600	 A0606	 A0609	 AA0612	 AA0615	 AA0618	 AAA0621	 AAA0624	 AAA0627	 AAA0630
	900	 A0906	 A0909	 AA0912	 AA0915	 AA0918	 AAA0921	 AAA0924	 AAA0927	 AAA0930
1050	1000	 A1006	 A1009	 AA1012	 AA1015	 AA1018	 AAA1021	 AAA1024	 AAA1027	 AAA1030
	1200	 A1206	 A1209	 AA1212	 AA1215	 AA1218	 AAA1221	 AAA1224	 AAA1227	 AAA1230
1550	1500	 A1506	 A1509	 AA1512	 AA1515	 AA1518	 AAA1521	 AAA1524	 AAA1527	 AAA1530
	1800	 A/F1806	 A/F1809	 AA/F1812	 AA/FF1815	 AA/FF1818	 AAA/FFF1821	 AAA/FFF1824	 AAA/FFF1827	 AAA/FFF1830
2150	2100	 A/F2106	 A/F2109	 AA/F2112	 AA/FF2115	 AA/FF2118	 AAA/FFF2121	 AAA/FFF2124	 AAA/FFF2127	 AAA/FFF2130

Viewed from exterior: **A** = Operable Sash, **F** = Fixed Panel. All Awning Window sashes come standard with a chain winder.

Gas Strut Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Gas Strut Windows may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed

STUD OPENING mm		960	1260	1560	1860	2160
FRAME SIZE mm		910	1210	1510	1810	2110
950	900	 A0909	 A0912	 A0915	 A0918	 A0921
	1000	 A1009	 A1012	 A1015	 A1018	 A1021
	1200	 A1209	 A1212	 A1215	 A1218	 A1221
	1500	 A1509	 A1512	 A1515	 A1518	 A1521

Casement Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Casement Windows may be subject to local variation or regulatory requirements.

+ Available Single or Double Glazed

STUD OPENING mm		660	960	1260	1560	1860	2160	2460
FRAME SIZE mm		610	910	1210	1510	1810	2110	2410
650 950 1050 1250 1550	600	 C0606	 CC0609	 CC0612	 CCC0615	 CCC0618	 CCCC0621	 CCCC0624
	900	 C0906	 CC0909	 CC0912	 CCC0915	 CCC0918	 CCCC0921	 CCCC0924
	1000	 C1006	 CC1009	 CC1012	 CCC1015	 CCC1018	 CCCC1021	 CCCC1024
	1200	 C1206	 CC1209	 CC1212	 CCC1215	 CCC1218	 CCCC1221	 CCCC1224
	1500	 C1506	 CC1509	 CC1512	 CCC1515	 CCC1518	 CCCC1521	 CCCC1524

Louvre Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Louvre Windows may be subject to local variation or regulatory requirements.

Louvre Information

- L = Single Louvre Bay
- Blades can be glass, timber or aluminium
- Handle on LH side viewed from inside

Frame Widths (mm)	
L	610
L	910
LL	1210
LL	1510
LL	1810
LLL	2110
LLL	2410
LLL	2710

152mm Blades Stud Opening (mm)	152mm Blades Frame Height (mm)	102mm Blades Stud Opening (mm)	102mm Blades Frame Height (mm)	Number of Blades
412	362	N/A	N/A	2
552	502	399	349	3
691	641	488	438	4
831	781	577	527	5
971	921	666	616	6
1110	1060	755	705	7
1250	1200	844	794	8
1390	1340	933	883	9
1529	1479	1021	971	10
1669	1619	1110	1060	11
1809	1759	1199	1149	12
1949	1899	1288	1238	13
2088	2038	1377	1327	14
2228	2178	1466	1416	15
2368	2318	1555	1505	16
2507	2457	1644	1594	17
2647	2597	1733	1683	18
2787	2737	1822	1772	19
2926	2876	1910	1860	20
3076	3016	1999	1949	21
N/A	N/A	2088	2038	22
N/A	N/A	2177	2127	23
N/A	N/A	2266	2216	24
N/A	N/A	2355	2305	25
N/A	N/A	2444	2394	26
N/A	N/A	2533	2483	27
N/A	N/A	2622	2572	28
N/A	N/A	2711	2661	29
N/A	N/A	2799	2749	30

Bi-fold Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Bi-fold Windows may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed

STUD OPENING mm		960	1260	1860	2160	2460	2760	3060	2760	3060	3360	3660
FRAME SIZE mm		910	1210	1810	2110	2410	2710	3010	2710	3010	3310	3610
		2 LITE		4 LITE				6 LITE				
650	600											
950	900											
1050	1000											
1250	1200											
	220											
	202											
	440											
	422											
	404											
	660											
	642											
	624											
	606											

Bi-Fold Numbering

eg: **422** (exterior view from left to right)

4	2	2
Total panels	No of panels opening to left	No of panels opening to right


Bay Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Bay Windows may be subject to local variation or regulatory requirements.

+ Available Single or Double Glazed


90° Bay Window Setout

Width of window	A	=	Slab dimension A – 300mm
Width of window	B	=	Slab dimension B – 150mm
Width of window	C	=	Slab dimension C – 150mm

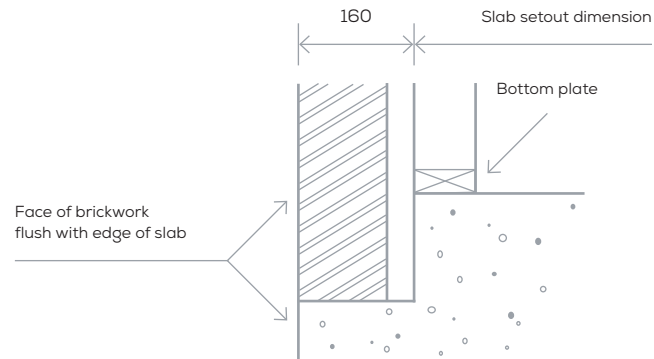

135° Bay Window Setout








Width of window	A	=	Slab dimension A – 140mm
Width of window	B	=	Slab dimension B – 160mm
Width of window	C	=	Slab dimension C – 160mm
Stud opening	D	=	$(2 \times \text{Slab dimension B} \times 0.7071) + \text{Slab dimension A} - 130\text{mm}$ where B and C are equal

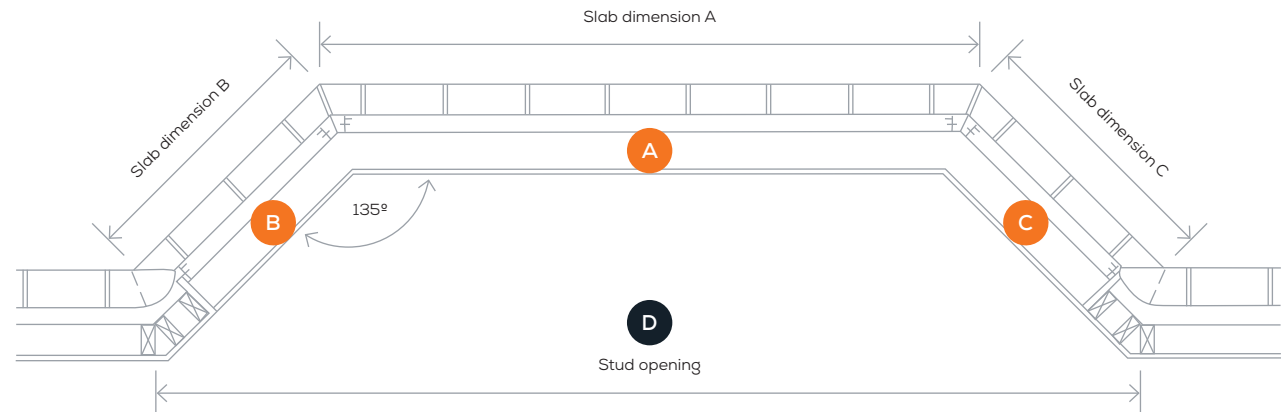

Sliding Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Sliding Doors may be subject to local variation or regulatory requirements.

+ Available Single or Double Glazed (Signature & Commercial versions only)




STUD OPENING mm		1560	1860	2160	2460	2760				
		FRAME SIZE mm	1510	1810	2110	2410	2710			
2130	2100						Also available in FS configuration 			
		SF2115	SF2118	SF2121	SF2124	SF2127				
2430	2400									
		SF2415	SF2418	SF2421	SF2424	SF2427				
STUD OPENING mm		2288	2738	3188	3638	4088				
		FRAME SIZE mm	2238	2688	3138	3588	4038			
2130	2100						Also available in FSFL configuration 			
		FSFR2122	FSFR2127	FSFR2131	FSFR2136	FSFR2140				
2430	2400									
		FSFR2422	FSFR2427	FSFR2431	FSFR2436	FSFR2440				



Viewed from exterior: **S** = Sliding Panel, **F** = Fixed Panel Arrow indicates sliding direction

Sliding Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Sliding Doors may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed (Signature & Commercial versions only)

STUD OPENING mm		2288	2738	3188	3638	4088	Also available in FSS configuration
FRAME SIZE mm		2238	2688	3138	3588	4038	
2130	2100						
	2430	2400					
		SSF2122	SSF2127	SSF2131	SSF2136	SSF2140	
		SSF2422	SSF2427	SSF2431	SSF2436	SSF2440	






STUD OPENING mm		3034	3634	4234	4834	5434
FRAME SIZE mm		2984	3584	4184	4784	5384
2130	2100					
	2430	2400				
		FSSF2130	FSSF2136	FSSF2142	FSSF2148	FSSF2154
		FSSF2430	FSSF2436	FSSF2442	FSSF2448	FSSF2454

Viewed from exterior: **S** = Sliding Panel, **F** = Fixed Panel Arrow indicates sliding direction

Sliding Doors STANDARD SIZES


The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Sliding Doors may be subject to local variation or regulatory requirements.

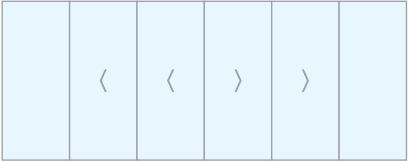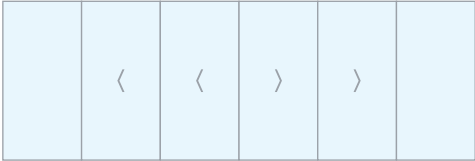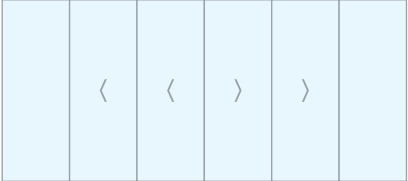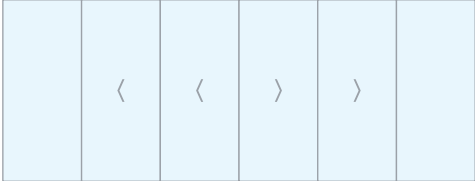+ Available Single or Double Glazed (Signature & Commercial versions only)

STUD OPENING mm		4496	5396	6296
FRAME SIZE mm		4446	5346	6246
2130	2100	 FSSSSF2144	 FSSSSF2153	 FSSSSF2162
	2400	 FSSSSF2444	 FSSSSF2453	 FSSSSF2462

Viewed from exterior: **S** = Sliding Panel, **F** = Fixed Panel Arrow indicates sliding direction

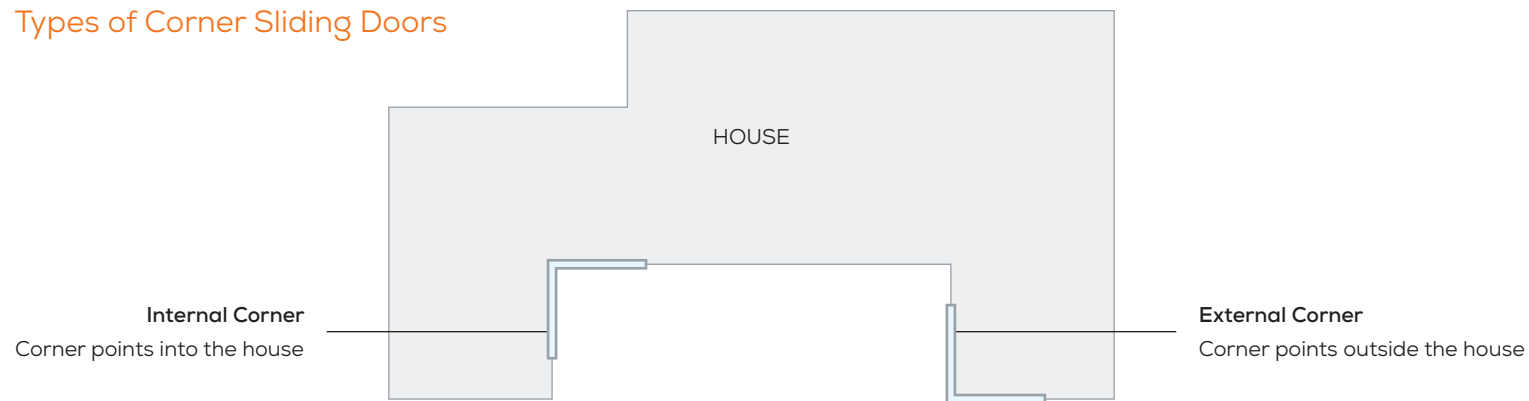Types of Corner Sliding Doors



Corner Sliding Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Corner Sliding Doors may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed



Signature 100mm Corner Sliding Door

Available 2100mm or 2400mm high

Note: Choose 1 size from each column to make a Corner Sliding Door

Internal			
Signature SD100 Door <u>with</u> handle		Signature SD100 Door <u>no</u> handle	
Door Width	Handing	Door Width	Handing
1476	2 Lite	1494	2 Lite
1716	2 Lite	1734	2 Lite
2076	2 Lite	2094	2 Lite
2316	2 Lite	2334	2 Lite

External			
Signature SD100 Door <u>with</u> handle		Signature SD100 Door <u>no</u> handle	
Door Width	Handing	Door Width	Handing
1640	2 Lite	1660	2 Lite
1880	2 Lite	1900	2 Lite
2240	2 Lite	2260	2 Lite
2480	2 Lite	2500	2 Lite

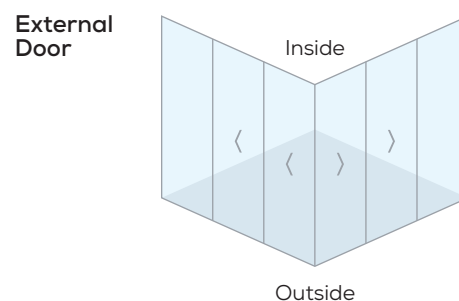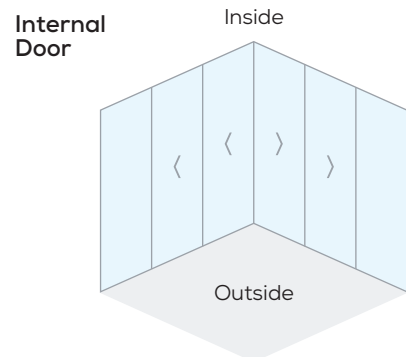

Signature 166mm Corner Sliding Door

Available 2100mm or 2400mm high

Note: Choose 1 size from each column to make a Corner Sliding Door
Cannot pair 2 Lite with another 2 Lite

Internal			
Signature SD166 Door <u>with</u> handle		Signature SD166 Door <u>no</u> handle	
Door Width	Handing	Door Width	Handing
1410	2 Lite	1427	2 Lite
1650	2 Lite	1667	2 Lite
2010	2 Lite	2027	2 Lite
2250	2 Lite	2267	2 Lite
2169	3 Lite	2187	3 Lite
2529	3 Lite	2547	3 Lite
3069	3 Lite	3087	3 Lite
3429	3 Lite	3447	3 Lite

External			
Signature SD166 Door <u>with</u> handle		Signature SD166 Door <u>no</u> handle	
Door Width	Handing	Door Width	Handing
1706	2 Lite	1726	2 Lite
1946	2 Lite	1966	2 Lite
2306	2 Lite	2326	2 Lite
2546	2 Lite	2566	2 Lite
2466	3 Lite	2484	3 Lite
2826	3 Lite	2844	3 Lite
3366	3 Lite	3384	3 Lite
3726	3 Lite	3744	3 Lite





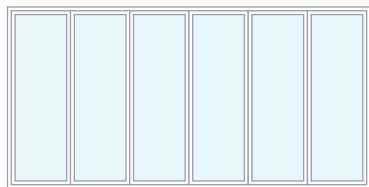
Check with your Bradnam's representative to confirm the stud and brick opening
Some configurations cannot be screened

Bi-fold Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Bi-fold Doors may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed

● Indicates operable door leaf with external door handle for external access

STUD OPENING mm		1650	2450	3250	4050	4850
FRAME SIZE mm		1600	2400	3200	4000	4800
		2 LITE	3 LITE	4 LITE	5 LITE	6 LITE
2130	2100					
	2430					
2430	220		321 	440 	541 	660 
	202		312 	431 	532 	651 
			330 	422 	523 	642 
			303 	413 	514 	633 
				404 	550 	624 
					505 	606 
						615 

Bi-Fold Numbering

eg: **321** (exterior view from left to right)

3	2	1
Total panels	No of panels opening to left	No of panels opening to right

Check with your Bradnam's representative to confirm the stud and brick opening

Corner Bi-fold Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Corner Bi-fold Doors may be subject to local variation or regulatory requirements.

+ Available Single or Double Glazed

Signature 100mm Corner Bi-fold Door

Available 2100mm or 2400mm high

Note: Choose 2 sizes from this column to make a Corner Bi-fold Door

Internal


Signature Bi-fold Door	
Door Width	Handing
1547	3 Lite
1667	3 Lite
1787	3 Lite
2307	3 Lite
2482	3 Lite
2667	5 Lite
3087	5 Lite
3347	5 Lite
3567	5 Lite
4177	5 Lite
4287	5 Lite
4767	7 Lite
5027	7 Lite

Note: Choose 2 sizes from this column to make a Corner Bi-fold Door


External

Signature Bi-fold Door	
Door Width	Handing
1593	3 Lite
1713	3 Lite
1833	3 Lite
2353	3 Lite
2528	3 Lite
2713	5 Lite
3133	5 Lite
3393	5 Lite
3613	5 Lite
4223	5 Lite
4333	5 Lite
4813	7 Lite
5073	7 Lite

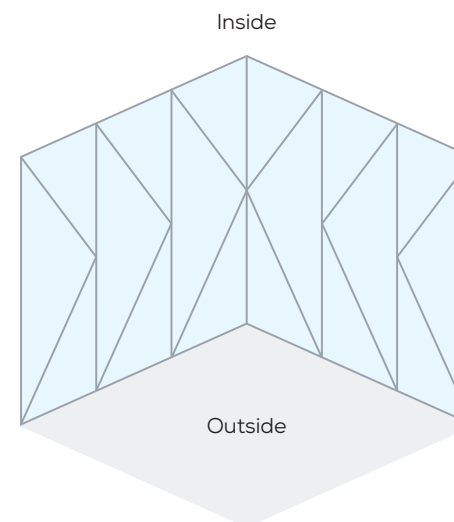Internal Door



External Door

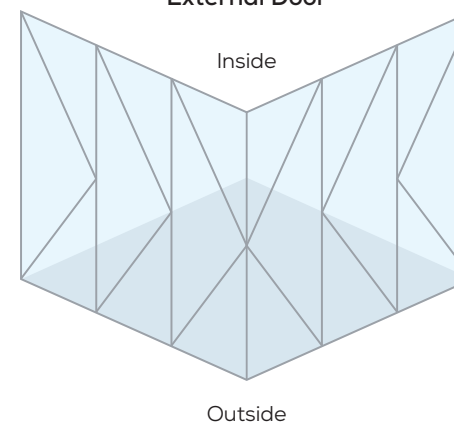

Check with your Bradnam's representative to confirm the stud and brick opening

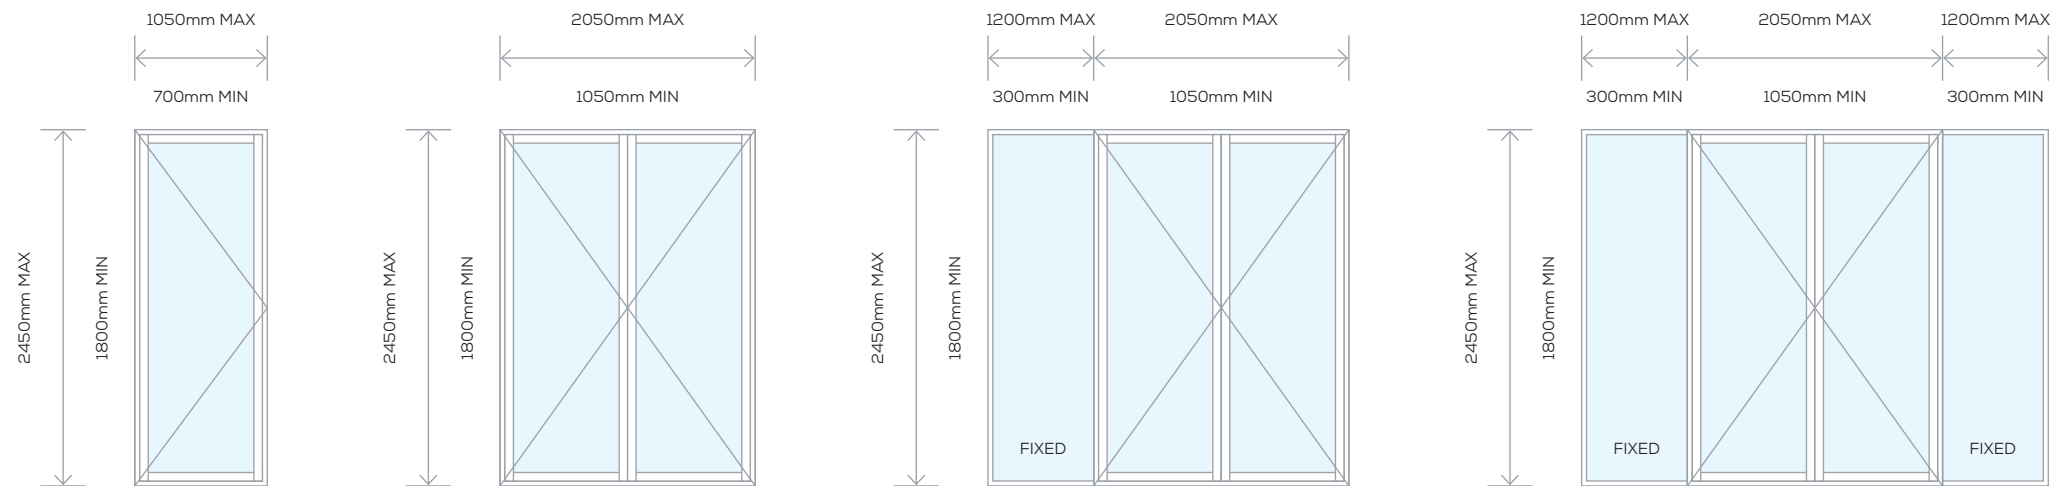
Hinged Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Hinged Doors may be subject to local variation or regulatory requirements.

+ Available Single or Double Glazed

Hinged Door Information

- Standard door leaf widths are 620mm, 720mm, 820mm
- Maximum leaf size 870mm
- Operable windows are available as side lites if required
- Hi lites are available subject to confirmation of structural performance
- All doors are to be supplied with sills



Signature Entrance Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Entrance Doors may be subject to local variation or regulatory requirements.

Low Profile Sill


STUD OPENING mm		928	1028	1128	1308	1754	1954
FRAME SIZE mm		878	978	1078	1258	1704	1904
2130	2100						
		820 Sash	920 Sash	1020 Sash	1200 Sash	2 x 820 Sash	2 x 920 Sash
2430	2400						
		820 Sash	920 Sash	1020 Sash	1200 Sash	2 x 820 Sash	2 x 920 Sash

Standard Sill

STUD OPENING mm		928	1028	1128	1308	1754	1954
FRAME SIZE mm		878	978	1078	1258	1704	1904
2137	2107						
		820 Sash	920 Sash	1020 Sash	1200 Sash	2 x 820 Sash	2 x 920 Sash
2437	2407						
		820 Sash	920 Sash	1020 Sash	1200 Sash	2 x 820 Sash	2 x 920 Sash



VISIT US ON SOCIAL MEDIA



WINDOWS & DOORS

INSECT & SECURITY SCREENS



Australian Owned & Made
Bradnam's products are proudly made in Australia and designed specifically to meet all Australian conditions.

Product availability, pricing, features, options, sizes, configurations and performance are subject to regional variations, design requirements and building codes.

Images are for illustration purposes only and may not accurately represent the product. Bradnam's Windows & Doors reserves the right to change, alter or delete any aspect of this product without notice.

We recommend visiting a Bradnam's showroom before ordering to view colour swatches, glass samples and actual products.



Bradnam's Windows and Doors . QBCC Act lic 58885
© Bradnam's Windows and Doors . v15 Aug 2025

Corbett Homes